



Australian Government
Australian Digital Health Agency



My Health Record Document Exchange Service Technical Service Specification

4 September 2020 v1.7

Approved for external use

Document ID: DH-3299:2020



Acknowledgements

Council of Australian Governments

The Australian Digital Health Agency is jointly funded by the Australian Government and all state and territory governments.

Regenstrief Institute (LOINC)

This material contains content from [LOINC™](#). The LOINC table, LOINC codes, LOINC panels and forms file, and LOINC linguistic variants file are copyright © 1995–2015, Regenstrief Institute, Inc. and the Logical Observation Identifiers Names and Codes (LOINC) Committee and available at no cost under the license at the [LOINC Terms of Use](#). LOINC is a trademark of Regenstrief Institute, Inc., registered in the United States.

HL7 International

This document includes excerpts of HL7™ International standards and other HL7 International material. HL7 International is the publisher and holder of copyright in the excerpts. The publication, reproduction and use of such excerpts is governed by the [HL7 IP Policy](#) and the HL7 International License Agreement. HL7 and CDA are trademarks of Health Level Seven International and are registered with the United States Patent and Trademark Office.

Disclaimer

The Australian Digital Health Agency (“the Agency”) makes the information and other material (“Information”) in this document available in good faith but without any representation or warranty as to its accuracy or completeness. The Agency cannot accept any responsibility for the consequences of any use of the Information. As the Information is of a general nature only, it is up to any person using or relying on the Information to ensure that it is accurate, complete and suitable for the circumstances of its use.

Document control

This document is maintained in electronic form and is uncontrolled in printed form. It is the responsibility of the user to verify that this copy is the latest revision.

Copyright © 2019 Australian Digital Health Agency

This document contains information which is protected by copyright. All Rights Reserved. No part of this work may be reproduced or used in any form or by any means – graphic, electronic, or mechanical, including photocopying, recording, taping, or information storage and retrieval systems – without the permission of the Australian Digital Health Agency. All copies of this document must include the copyright and other information contained on this page.

OFFICIAL

Document information

Key information

Owner	Head of Delivery
Contact for enquiries	Australian Digital Health Agency Help Centre
Phone	1300 901 001
Email	help@digitalhealth.gov.au

Product or document version history

Product or document version	Date	Release comments
1.0	20 December 2011	Draft for limited release.
1.1	18 January 2012	Incorporated stakeholder feedback.
1.2	26 April 2012	<p>New Additions:</p> <ul style="list-style-type: none"> • Conformance Points starting with DEXS-T 90+ • 3.1.2 SOAP signatures • 4.2.3 Transmission timestamp • 4.2.4 Transmission Signature • Table 3 - XSDocumentEntry Document Type and Class Code value set • 4.3 Supported Responses <p>Updates:</p> <ul style="list-style-type: none"> • DEXS-T 3, DEXS-T 5, DEXS-T 18, DEXS-T 53, DEXS-T 55, DEXS-T 56, DEXS-T 61, DEXS-T 83 • Figure 1 - Document map • Figure 2 - PCEHR functions addressed • 3.3.5 setDocumentAccessLevel (Deprecated) • 4.3 Common Response Status • Table 2 – Document Metadata to XDS.b Document Entry mapping • Table 12- PCEHRHeader (username case changed, HPI-I alternative needs to be approved) • Appendix A XSD and WSDL
1.3	22 October 2012	Changes due to HPI-O relaxation for conformant repositories
1.4	12 April 2013	Approved for external release – see details in PCEHR B2B Gateway Service Release Note v1.5
1.5	13 November 2014	Updates based on PCEHR Release 4.2 and Release 5

Product or document version	Date	Release comments
1.5.1	27 December 2014	Minor editorial corrections.
1.6	23 September 2019	Refer to <i>My Health Record B2B Gateway Services - Release Note v1.8</i> for details.
1.7	23 January 2020	Update based on My Health Record release 11. Added new 'Goals of Care' ClassCode and TypeCode to 'Table 1 – XSDDocumentEntry Document Type and Class Code value set'

Table of contents

1	Introduction	7
1.1	Purpose	7
1.2	Intended audience	7
1.3	Context.....	7
1.3.1	My Health Record B2B interactions	8
1.3.2	My Health Record System conformant repositories	8
1.4	Scope of document	9
1.4.1	In scope.....	9
1.4.2	Out of scope	9
1.5	Conformance points.....	10
1.6	Document map	11
1.7	Usages	11
2	Standards and technology platform	12
3	Computational viewpoint	14
3.1	Information security	14
3.1.1	Security.....	14
3.1.2	SOAP signatures.....	14
3.2	Service interface realisation.....	14
3.3	Interactions between CISs, My Health Record portals and the My Health Record system	16
3.3.1	ITI-41 Provide & Register Document Set – b	16
3.3.2	ITI-43 Retrieve Document Set.....	18
3.3.3	ITI-18 Registry Stored Query	20
3.3.4	removeDocument.....	21
3.4	Interactions between the My Health Record system and My Health Record conformant repositories	23
3.4.1	ITI-42 Register Document Set – b.....	23
3.4.2	ITI-43 Retrieve Document Set.....	25
3.4.3	removeDocument.....	25
4	Information viewpoint.....	26
4.1	Character set support	26
4.2	Document Exchange Service Logical Service Specification to IHE XDS.b mapping.....	26
4.2.1	Document metadata and XDS.b document entry types.....	27
4.2.2	Submission metadata and XDS.b submission set types	41
4.2.3	Document version information and XDS.b association types	44
4.2.4	Document retrieval request and XDS.b retrieve document set request types.....	45
4.2.5	FindDocumentsRequest and XDS.b registry stored queries	45
4.2.6	Service faults.....	47

4.2.7	removeDocument message operation message types	48
4.3	Other data elements	49
4.3.1	Common Header.....	49
4.3.2	PCEHRHeader (Request).....	50
4.3.3	Transmission timestamp	52
4.3.4	Transmission signature.....	52
4.4	My Health Record System responses.....	53
4.4.1	Common response status.....	53
4.4.2	Standard SOAP faults.....	54
4.4.3	XDS.b responses	56
5	Engineering viewpoint	58
5.1	Discovery services	58
Appendix A	XSD and WSDL	59
Appendix B	My Health Record System document link format	61
Acronyms	62
References	63

1 Introduction

1.1 Purpose

This document provides an implementable technical interface specification for the Document Exchange services using IHE's Cross-Enterprise Document Sharing-b (XDS-b) specification and accompanying bespoke web services.

This document should be read in conjunction with the *My Health Record Document Exchange Service Logical Service Specification* [DOCX-LSS].

Note that all references in this document to the “logical service specification” are referring to the *My Health Record Document Exchange Service Logical Service Specification*.

1.2 Intended audience

This document is intended for:

- implementers of the My Health Record system (normative)
- developers and implementers of My Health Record conformant repositories (normative)
- Australian Digital Health Agency architects and eSolution managers (normative)
- jurisdictional digital health programs (informative)
- the Australian health informatics standards development community (informative)
- developers and implementers of software products which seek to interact with the My Health Record system (normative).

This is a technical document which makes use of the UML2.3 standard.

It is assumed that the audience is familiar with:

- UML and service-oriented architecture concepts and patterns
- RM-ODP (Reference Model of Open Distributed Processing) reference model [RM-ODP]
- XDS (Cross-Enterprise Document Sharing) [XDS]
- *ATS 5820-2010 E-health Web Services Profile* [ATS 5820-2010]
- *ATS 5821-2010 E-health XML Secured Payload Profiles* [ATS 5821—2010].

1.3 Context

This document describes an XDS.b and web services–based realisation of the operations specified within the *My Health Record Document Exchange Service Logical Service Specification* [DOCX-LSS].

This document addresses two key solution areas:

- the exchange of documents via the My Health Record system's “B2B” (business to business) interfaces
- interactions between the My Health Record system and conformant repositories.

1.3.1 My Health Record B2B interactions

The My Health Record system provides a suite of interfaces which may be used by connecting systems (clinical information systems and My Health Record system portals) to perform operations on a digital health record.

The interfaces relevant to My Health Record B2B interactions are provided in section 3.3.

1.3.2 My Health Record System conformant repositories

A My Health Record System Conformant Repository is a system which stores and provides access to clinical documents in a manner conformant with My Health Record System specifications.

The interfaces relevant to My Health Record B2B interactions are provided in section 3.4.

Figure 1 shows how the set of operations addressed in this specification fit into the broader set of My Health Record functionality.

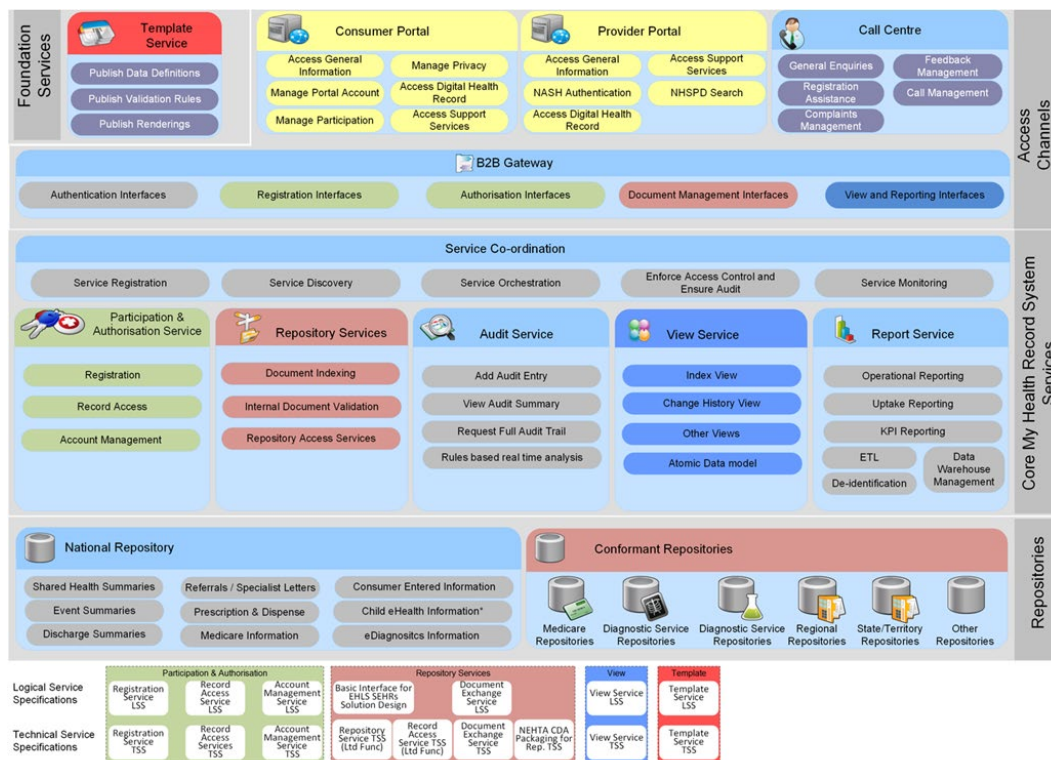


Figure 1 - My Health Record functions addressed

As illustrated in Figure 2, the Document Exchange Service is expected to be used by clinical systems (which, for the purposes of this illustration, include contracted service providers and conformant provider portals), conformant consumer portals and conformant repositories.

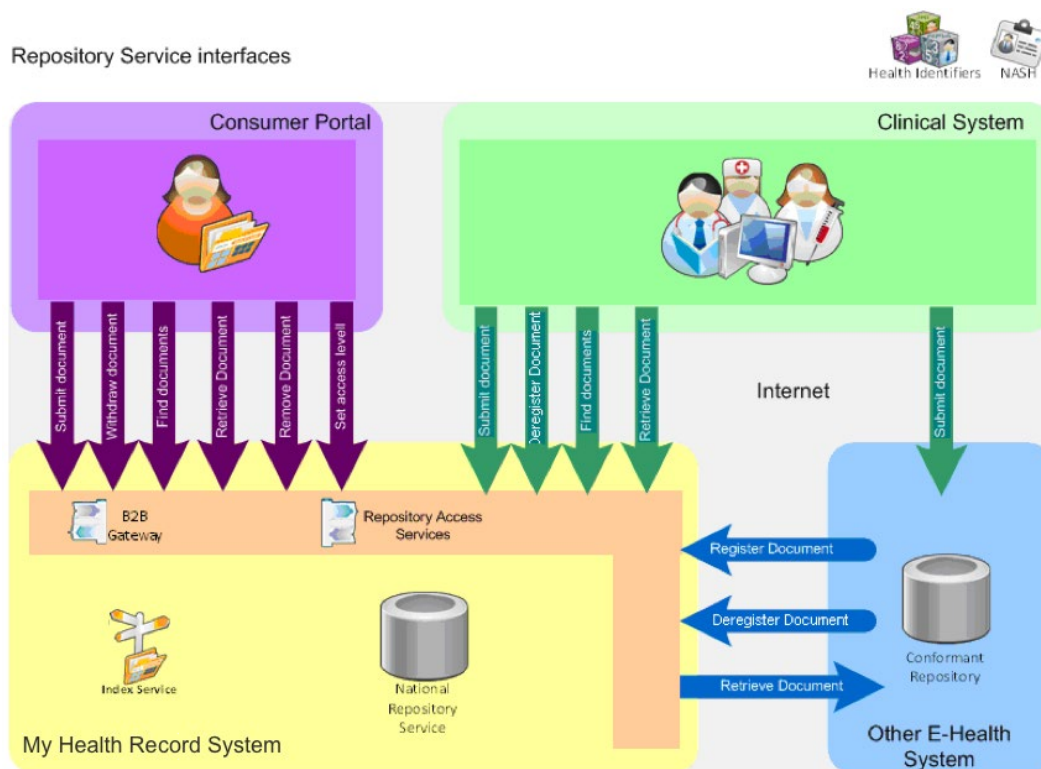


Figure 2 - Document Exchange Service systems and interactions

1.4 Scope of document

This document provides a realisation of the set of functions outlined in the logical service specification [DOCX-LSS] using IHE's XDS.b platform.

1.4.1 In scope

An XDS.b-based realisation of all functions specified in the logical service specification [DOCX-LSS].

1.4.2 Out of scope

- Other My Health Record services which may be used by clinical information systems, portals or conformant repositories.
- The re-statement of the system roles, interactions and conformance points specified in the logical service specification [DOCX-LSS].
- Support for platforms other than those specified in IHE's XDS.b profile. Examples of excluded platforms include those based on the ATS-5822 Secure Message Delivery protocol and HSSP's Retrieve, Locate and Update Service Specification.

1.5 Conformance points

This specification contains conformance points that identify normative requirements that are to be met by identified members of the Document Exchange Service interface user system roles (as described in the logical service specification) in order to comply with this specification when interacting with the Document Exchange Service interface.

Conformance points include requirements on a party (Service Invoker) invoking the service and the party (Document Source) providing the service.

Any capability required to meet a conformance point **SHALL** be considered part of the requirements to be met under this specification.

Conformance points are identified within this document by the means of the following notation:

DEXS-T 0	This is an example only. Conformance points SHALL be numbered and contain an identifier of 'DEXS-T' which identifies them as being applicable to the <i>My Health Record Document Exchange Service Technical Service Specification</i> .
-----------------	---

The keywords **SHALL**, **SHALL NOT**, **SHOULD** and **SHOULD NOT** in this document are to be interpreted as described in IETF's RFC 2119 [RFC2119].

Note that the conformance point numbering is non-consecutive in some sections; however, numbers remain uniquely assigned to each conformance points.

1.6 Document map

Figure 3 shows how this document and other My Health Record artefacts are grouped according to the eHealth Interoperability Framework layers of abstraction and viewpoints.

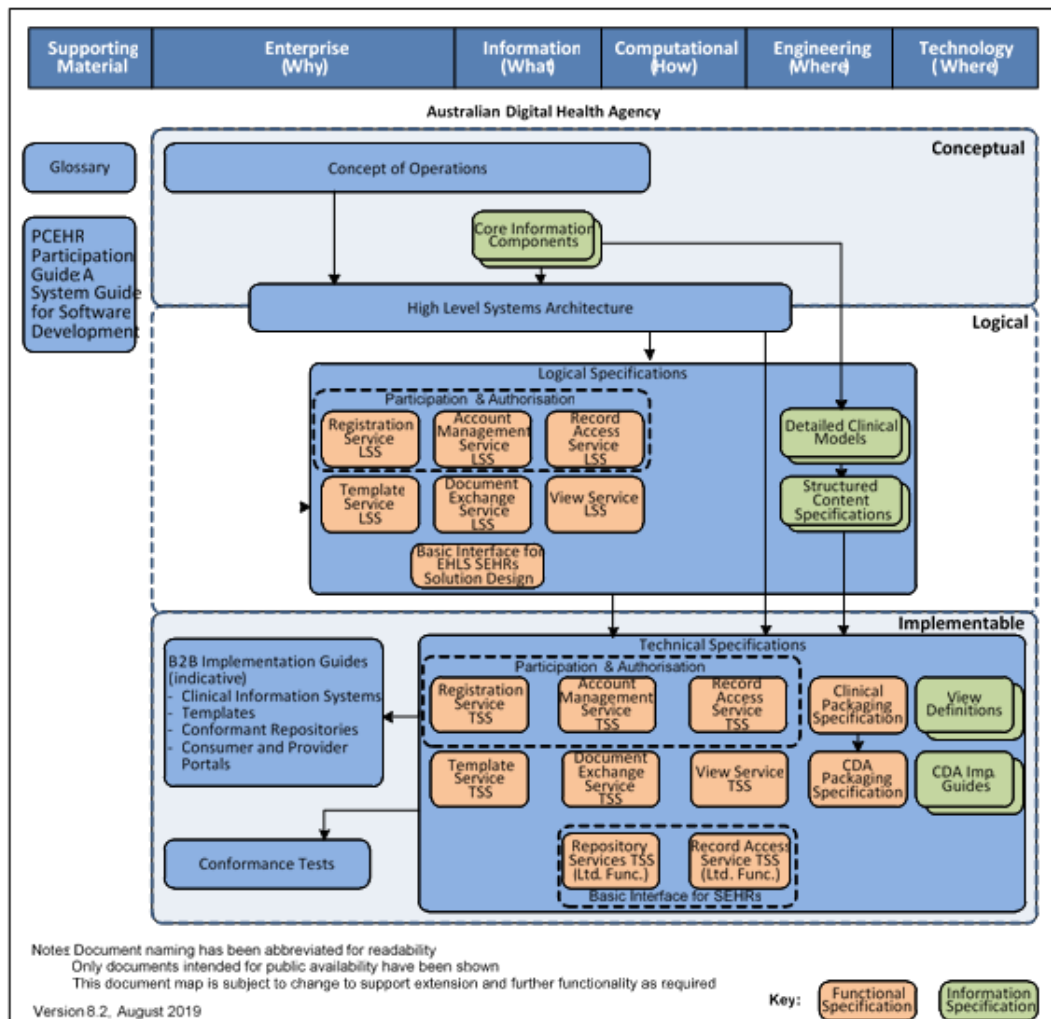


Figure 3 - Document map

1.7 Usages

This document uses the following conventions to denote special terms.

Convention	Meaning
<i>Italicised Initial Capitals</i>	System role for conformance points
<code>courier new typeface</code>	Parameter

2 Standards and technology platform

A standards and technology platform is a collection of standards and technologies that may be used collectively to realise an implementation of one or more service interfaces specified within a logical service specification.

A single service interface within a logical specification must be realised fully by a single standards and technology platform. However, each service interface specified within a logical specification may be realised wholly on different standards and technology platforms.

The standards and technology platform for this technical service specification is made up from a set of specifications and standards.

- IHE's *Cross-Enterprise Document Sharing (XDS.b)* is a specification for sharing clinical documents within a trusted community called an Affinity Domain. This Affinity Domain contains a single document registry and one or more document repositories. References to the set of IHE specifications are provided on page 60.

The core XDS.b specification does not provide a mechanism for removing documents or updating document metadata. IHE's XDS.b Metadata Update Trial Implementation supplement [IHE_TS] proposes a mechanism for achieving this functionality. However, there are a number of areas where gaps have been identified between this specification and the My Health Record system requirements, specifically:

- The *ITI-62 Remove Document Set* transactions specified within the XDS.b Metadata Update supplement specifies a solution that deletes the ebXML registry entries. The My Health Record requirements only support a "logical removal" where the entry is retained but marked as removed.
- The *ITI-57 Update Document Set* transaction requires the Document Administrator Actor (in this instance a clinical information system, conformant repository or portal) to supply the full XSDocumentEntry object (which describes the full set of document metadata). The XDS registry may then perform updates on any index entries where the supplied XSDocumentEntry differs from the registry (with the supplied data taking precedence over the stored data). The My Health Record system only allows the XSDocumentEntry.confidentialityCode and XSDocumentEntry.availabilityStatus fields to be updated (and only in specific use cases by specific actors). Providing a function which allows a wider set of data to be updated and then constraining this via policy offers an inelegant user interface and may pose a security risk if errors occur within policy enforcement.
- The *XDS Metadata Update* specification is a trial implementation supplement and may be changed (or withdrawn). Therefore, it does not represent a stable basis for development.
- Given the above concerns, the setDocumentAccessLevel, removeDocument and deregisterDocument operations are realised as bespoke web services. The XDS.b Metadata Update Trial Implementation supplement is not considered further within this document.

- *ATS 5820 Web Service Profile*, issued by Standards Australia in conjunction with the Australian Digital Health Agency, provides a common platform for web service communication across Australian digital health systems.

Figure 4 illustrates the specification and standards included in this technical service specification.

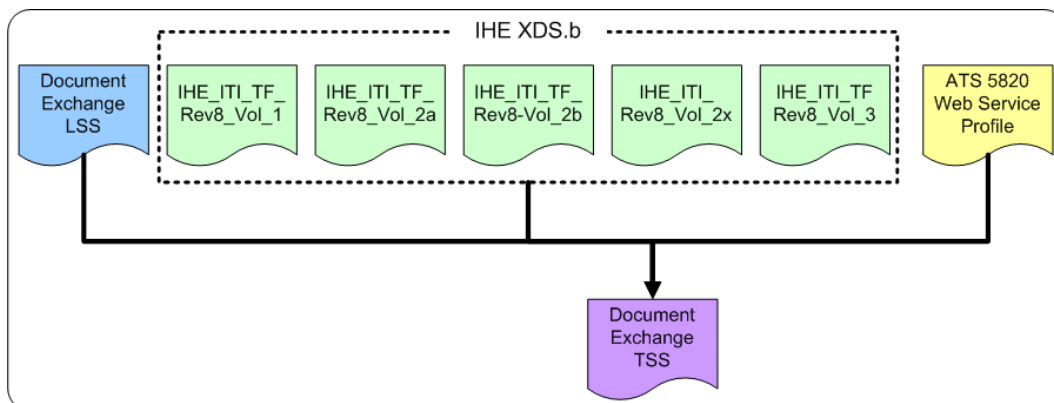


Figure 4 - Document Exchange Standards Platform

In addition to the above items, this specification depends on the following foundation infrastructure services:

- Healthcare Identifiers Service (HI Service) for identification of healthcare provider organisations (via HPI-Os), healthcare provider individuals (via HPI-Is) and the subject of care (an individual identified by an IHI).
- The National Authentication Service for Health (NASH) compliant X.509 certificates.

Conformance points

The following conformance points define the application of the *E-health Web Services Profile* [ATS 5820-2010] to service interactions:

DEXS-T 1	All implementations SHALL conform to the Web Services Base Profile from the Standards Australia E-health Web Services Profiles [ATS 5820-2010] for all web service invocations with the following conformance point taking precedence:
DEXS-T 2	<ul style="list-style-type: none"> • all implementations SHALL implement the TLS Security Profile from the Standards Australia E-health Web Services Profiles [ATS 5820-2010] for all web service invocations.

Informative note

The naming of operations, data types and services specified within the set of IHE specifications will be re-used by the specification and will not be changed to align with the naming conventions specified in [ATS 5820-2010].

With the exception of naming conventions and explicit support for MTOM-XOP, the IHE XDS.b Specification is closely aligned with the specification provided within the ATS Web Services Profiles document [ATS 5820-2010]. There are no changes required to the IHE XDS.b Specification as a result of alignment with ATS 5820-2010.

3 Computational viewpoint

The computational viewpoint addresses how the service interfaces and service operations defined in the logical service specification map onto the operation and transport specifications provided by the standards and technology platform.

3.1 Information security

3.1.1 Security

Conformance points

DEXS-T 3	All implementations SHALL implement the TLS Security Profile provided within the <i>ATS 5820 Standards Australia E-health Web Services Profiles</i> specification [ATS 5820-2010].
-----------------	---

3.1.2 SOAP signatures

Conformance points

DEXS-T 90	The service invoker and service provider SHALL include a Transmission Signature (section 4.3.4) containing a signed attestation of elements contained within the SOAP message on all SOAP request and response messages, except where the response contains a SOAP fault.
DEXS-T 91	The service invoker and service provider SHALL create the signature using a certificate that asserts the same identity as that asserted in the TLS connection.
DEXS-T 92	The service provider SHOULD respond to an invalid Transmission Signature by rejecting the entire message and responding with an error.

3.2 Service interface realisation

This section shows the service interfaces defined in the logical service specification and specifies how these are realised on the chosen standards and technology platform.

Figure 5 shows how the logical operations are realised in this technical service specification. The IHE transactions are shown with a prefix of the unique ITI code assigned by IHE to each transaction. The prefix “WS:” is used to indicate bespoke web services.

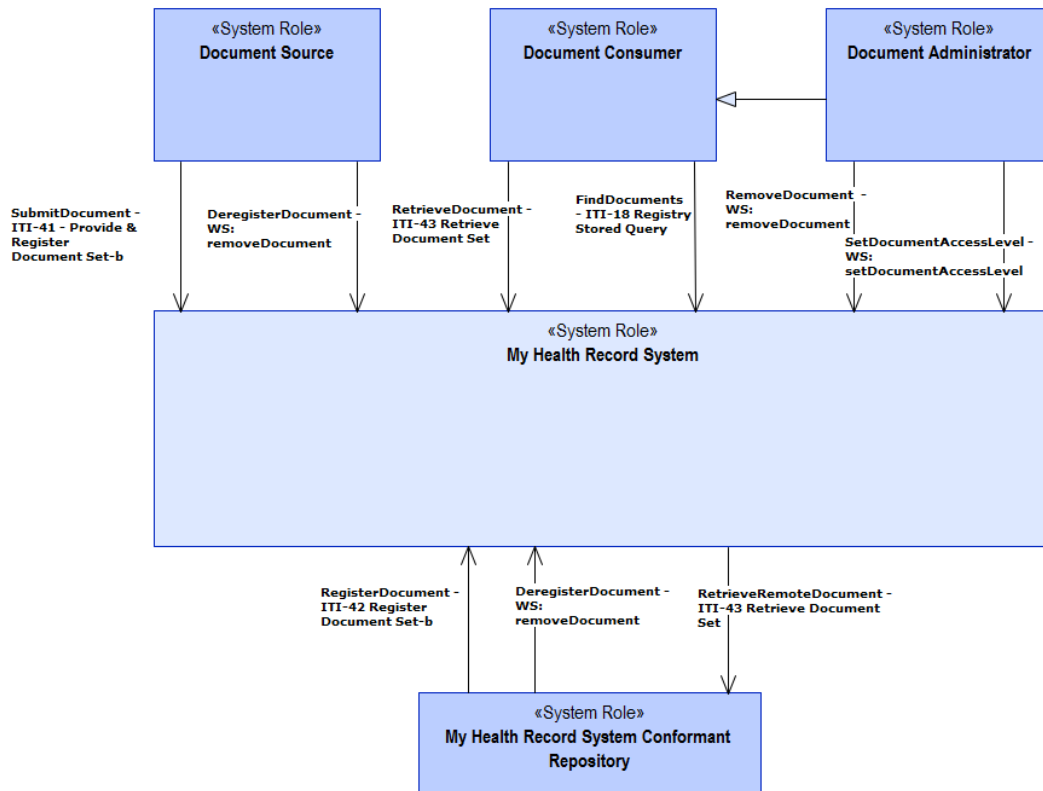


Figure 5 - Mapping of LSS operations to XDS.b transactions

Table 2 - Mapping between logical and technical operations

Logical Service Specification	Technical Service Specification
DocumentSubmission.submitDocument	ITI-41 Provide & Register Document Set – b
DocumentRetrieval.retrieveDocument	ITI-43 Retrieve Document Set
DocumentRetrieval.findDocuments	ITI-18 Registry Stored Query
ConformantRepositoryRetrieval.retrieveRemoteDocument	ITI-43 Retrieve Document Set
DocumentRegistration.registerDocument	ITI-42 Register Document Set - b
DocumentRegistration.deregisterDocument	Bespoke Web Service – removeDocument
DocumentManagement.setDocumentAccessLevel	Bespoke Web Service – setDocumentAccessLevel
DocumentManagement.removeDocument	Bespoke Web Service - removeDocument

Conformance points

DEXS-T 4 Implementations **SHALL NOT** rely on support for IHE interactions unless they are specified within the ‘Technical Service Specification’ column in Table 1.

3.3 Interactions between CISs, My Health Record portals and the My Health Record system

3.3.1 ITI-41 Provide & Register Document Set – b

Name in logical service specification: submitDocument

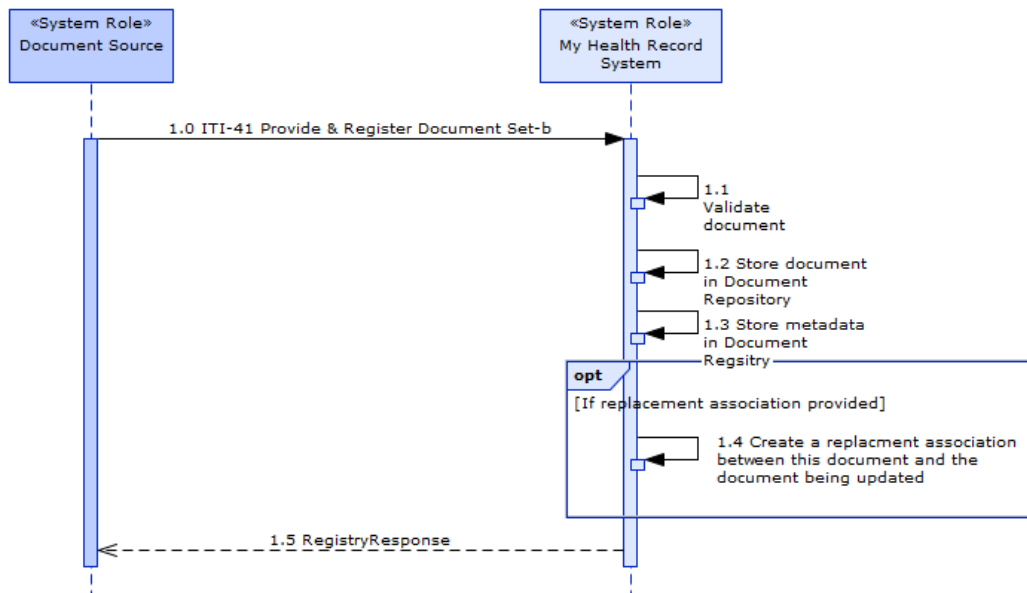


Figure 6 - Provide & Register Document Set-b

The Provide & Register Document Set–b transaction represents an XDS.b realisation of the submitDocument operation defined in the logical service specification.

This operation allows a Document Source to submit a document and associated metadata to the My Health Record system.

The My Health Record system will implement the XDS.b Document Repository and XDS.b Document Registry Actors. The XDS.b Document Source actor will be implemented by clinical information systems (CISs) and consumer portals (for the submission of items such as Consumer Entered Information) seeking to upload documents to the My Health Record system.

The Provide & Register Document Set-b operations also provide support for document versioning through the use of association constructs. In this model, a document may be submitted with metadata that states that the current document replaces an existing document. If the existing document does not exist within the My Health Record system, then an error will be returned.

3.3.1.1 Pre-conditions

Within the scope of this section, the Document Repository and Document Registry Roles **SHALL** exclusively be fulfilled by the My Health Record system.

3.3.1.2 Interaction

Conformance points

DEXS-T 6	The normative description of the Provide & Register Document Set – b operation as provided in section 3.41 of volume 2B of the IHE IT Infrastructure Technical Framework Specification [ITITF-2B] SHALL apply, including any further document or section references therein, with the following conformance points taking precedence:
DEXS-T 7	<ul style="list-style-type: none"> the operation request SHALL include the full “Common Header” as specified in section 4.3.1
DEXS-T 8	<ul style="list-style-type: none"> the Provide & Register Document Set transaction SHALL contain exactly one XDS Document element
DEXS-T 9	<ul style="list-style-type: none"> the Provide & Register Document Set transaction SHALL contain one or more unique XSDocumentEntry elements
DEXS-T 10	<ul style="list-style-type: none"> the Provide & Register Document Set transaction SHALL NOT contain XDS Folder elements
DEXS-T 11	<ul style="list-style-type: none"> the Provide & Register Document Set transaction SHALL only support the Document Replace Option and SHALL NOT support the Document Addendum, Document Transformation and Folder Management options (section 3.4.1.61 within [ITITF-2B] provides the definition of these terms).

Informative note

The specification provides support for submitting a document to a Document Repository and does not provide support for the use of the ITI-41 transaction between entities fulfilling the Document Source and Document Recipient actors (as shown in section 3.41.4 of ITITF-1).

All CDA documents will be contained within CDA packages. An XDS message will contain one CDA Package.

3.3.1.3 Post-conditions

Conformance points

DEXS-T 12	Upon successful execution, the <i>My Health Record System</i> SHALL persist the document and return a status of ‘urn:oasis:names:tc:ebxml-regrep:ResponseStatusType:Success’.
------------------	--

3.3.1.4 Inputs, outputs and faults

In order to support the inclusion of the Common Header and alignment with ATS-5820 Web Services Profile [ATS 5820-2010], the service will use the WSDL provided in Appendix A rather than those specified within the IHE specifications.

Operation data fields	Data structures
Input	ihe:ProvideAndRegisterDocumentSetRequest
Output	rs:RegistryResponse

Conformance points

DEXS-T 13	The conformance points specified in sections 4.2.1, 4.2.2 and 4.2.3 SHALL apply to this operation.
------------------	---

3.3.1.5 Service faults

The specification for Service Faults associated with XDS.b transactions is provided within section 4.2.6.

3.3.2 ITI-43 Retrieve Document Set

Name in logical service specification: retrieveDocument

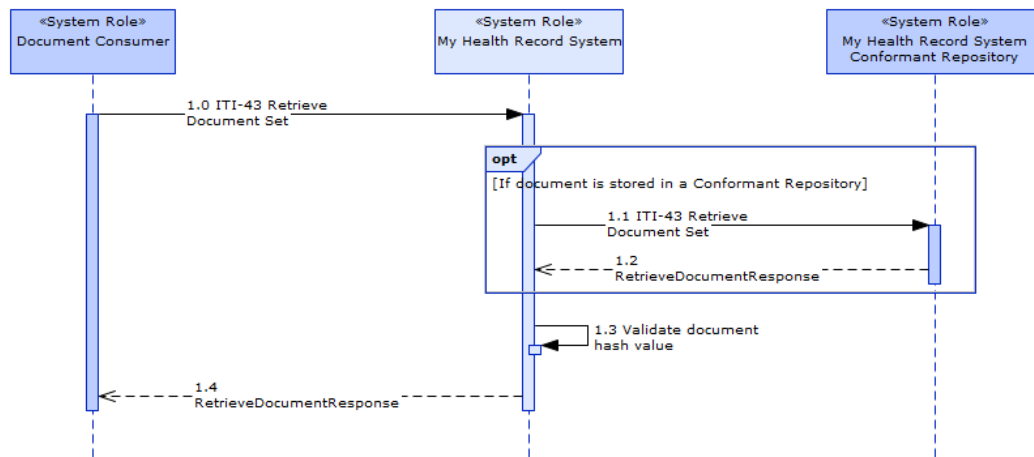


Figure 7 - ITI-43 Retrieve Document Set

The Retrieve Document Set transaction represents an XDS.b realisation of the retrieveDocument operation defined in the logical service specification.

This operation allows a Document Consumer to retrieve a document from the My Health Record system.

The My Health Record System will implement the XDS.b Document Repository and XDS.b Document Registry Actors. The XDS.b Document Consumer actor will be implemented by clinical information systems My Health Record System portals seeking to retrieve a document from the My Health Record system.

3.3.2.1 Pre-conditions

Within the scope of this section, the Document Registry role shall be fulfilled exclusively by the My Health Record system.

3.3.2.2 Interaction

Conformance points

DEXS-T 14	All conformance points specified in the <i>My Health Record System Document Exchange Service Logical Service Specification</i> for the retrieveDocument operation SHALL apply to this operation.
DEXS-T 15	The normative description of the Retrieve Document Set operation as provided in section 3.43 of volume 2B of the <i>IHE IT Infrastructure Technical Framework Specification [ITITF-2B]</i> SHALL apply, including any further document or section references therein, with the following conformance points taking precedence:
DEXS-T 16	<ul style="list-style-type: none"> the operation request SHALL include the full “Common Header” as specified in section 4.3.1
DEXS-T 17	<ul style="list-style-type: none"> Retrieve Document Set transactions SHALL contain exactly one XDS document element.

3.3.2.3 Post-conditions

Conformance points

DEXS-T 18	Upon successful execution, the My Health Record System SHALL return the requested document along with a status of ‘urn:oasis:names:tc:ebxmlregrep:ResponseStatusType:Success’.
------------------	---

3.3.2.4 Inputs, outputs and faults

In order to support the inclusion of the Common Header and alignment with ATS-5820 Web Services Profile [ATS 5820-2010], the service will use the WSDL provided in Appendix A rather than those specified within the IHE specifications.

Operation data fields	Data structures
Input	ihe:RetrieveDocumentSetRequest
Output	ihe:RetrieveDocumentSetResponse

Conformance points

DEXS-T 19	The ihe:RetrieveDocumentSetRequest SHALL contain exactly one ihe:DocumentRequest element.
DEXS-T 20	The ihe:RetrieveDocumentRequest SHALL NOT contain an ihe:HomeCommunityId element.
DEXS-T 21	The ihe:RetrieveDocumentSetResponse SHALL contain a maximum of one ihe:DocumentResponse element.
DEXS-T 22	The conformance points specified in section 4.2.4 SHALL apply to this operation.

3.3.2.5 Service faults

The specification for Service Faults associated with XDS.b transactions is provided within section 4.2.6.

3.3.3 ITI-18 Registry Stored Query

Name in logical service specification: findDocuments.

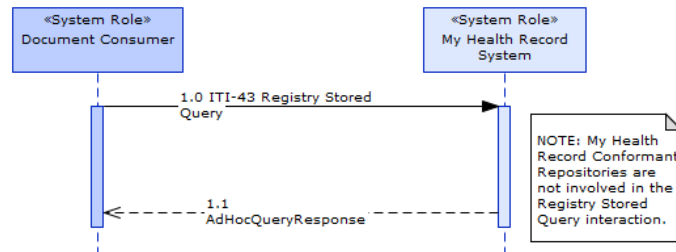


Figure 8 - ITI-43 Registry Stored Query

The Registry Stored Query transaction represents an XDS.b realisation of the findDocuments operation defined in the logical service specification.

This operation allows a Document Consumer to find one or more documents within the My Health Record system which match a set of provided search criteria.

The My Health Record system will implement the XDS.b Document Registry Actor. The XDS.b Document Consumer actor will be implemented by clinical information systems, My Health Record portals, and mobile clients seeking to find documents within the My Health Record system.

3.3.3.1 Pre-conditions

Within the scope of this section, the Document Registry role shall be fulfilled exclusively by the My Health Record system.

3.3.3.2 Interaction

Conformance points

DEXS-T 23	All conformance points specified in the <i>My Health Record Document Exchange Service Logical Service Specification</i> for the findDocuments operation SHALL apply to this operation.
DEXS-T 24	The normative description of the Registry Stored Query operation as provided in section 3.18 of volume 2A of the IHE IT Infrastructure Technical Framework Specification [ITITF-2A] SHALL apply, including any further document or section references therein, with the following conformance point taking precedence:
DEXS-T 25	<ul style="list-style-type: none"> the operation request SHALL include the full “Common Header” as specified in section 4.3.1.

3.3.3.3 Post-conditions

Conformance points

DEXS-T 26	Upon successful execution, the My Health Record System SHALL return the list of documents matching the supplied criteria along with a status of 'urn:oasis:names:tc:ebxml-regrep:ResponseStatusType:Success'.
------------------	--

3.3.3.4 Inputs, outputs and faults

In order to support the inclusion of the Common Header and alignment with ATS-5820 Web Services Profile [ATS 5820-2010], the service will use the WSDL provided in Appendix A rather than those specified within the IHE specifications.

Operation data fields	Data structures
Input	query:AdHocQueryRequest
Output	query:AdHocQueryResponse

Conformance points

DEXS-T 27	The conformance points specified in section 4.2.5 SHALL apply to this operation.
------------------	---

3.3.3.5 Service faults

The specification for Service Faults associated with XDS.b transactions is provided in section 4.2.6.

3.3.4 removeDocument

Name in logical service specification: removeDocument and deregisterDocument.

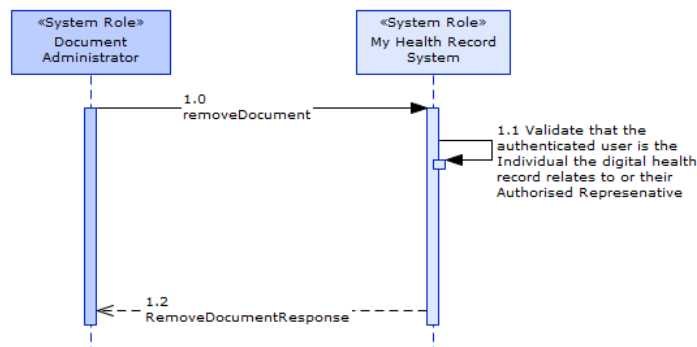


Figure 9 - removeDocument

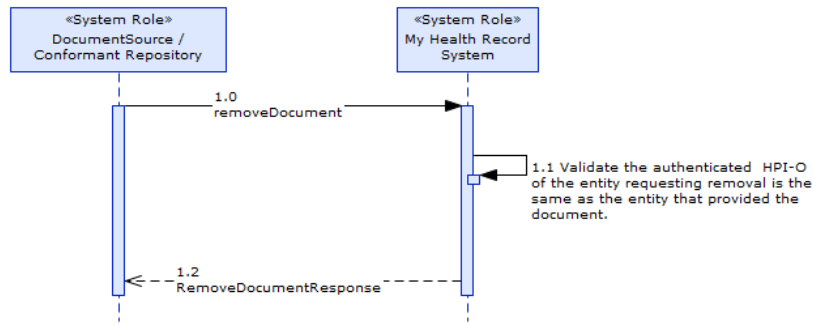


Figure 10 - removeDocument (deregisterDocument)

The logical service specification specifies operations for removing and deregistering documents. These functions are shown as discrete operations in order to highlight the differences in behaviours within the logical model, however the set of parameters and data types used by both services are identical.

At the technical layer, these operations will be realised using the single service interface: removeDocument.

The logical separation provided in the logical service specification still applies and systems are required to conform to a specific logical service specification system role and logical operation when invoking the technical removeDocument operation.

As specified in the logical service specification, the removal of documents is performed at a purely logical level and is realised by manipulating metadata associated with the document.

3.3.4.1 Pre-conditions

Conformance points

DEXS-T 28	The system seeking to update the status SHALL have the XDSDocumentEntry.uniqueId of the document that is to be removed.
------------------	--

3.3.4.2 Interactions

Conformance points

DEXS-T 29	Any realisation of the removeDocument operation specified in this technical service specification SHALL meet all conformance points specified for the removeDocument operation in the logical service specification [DOCX-LSS].
DEXS-T 30	Where the removeDocument operation provided in this technical service specification is used to realise the deregisterDocument operation, as specified in the logical service specification [DOCX-LSS], those conformance points associated with the deregisterDocument operation in the logical service specification [DOCX-LSS] SHALL apply.
DEXS-T 31	The operation request SHALL include the full “Common Header” as specified in section 4.3.1.
DEXS-T 32	The reasonForRemoval field SHALL be set to either ‘IncorrectIdentity’, ‘ElectToRemove’ or ‘Withdrawn’.

Informative note

The response reason of 'ElectToRemove' **MAY** only be used by those systems acting on behalf of a consumer. The response reason of 'Withdrawn' **MAY** only be used by those systems acting on behalf of a provider. The response reason of 'IncorrectIdentity' **MAY** be used by those systems acting on behalf of a consumer or a provider.

3.3.4.3 Post-conditions

Conformance points

DEXS-T 33	Upon successful execution, the My Health Record System SHALL logically remove the document and return a positive status response.
------------------	--

3.3.4.4 Inputs, outputs and faults

The fields specified for this operation within the request and response entities within the logical service specification are realised directly within the XML Schema Definition referenced within the WSDL.

A representation of the request and response data types is located in section 4.2.7.

The XML Schema Definition and WSDL files for this operation are referenced in Appendix A.

3.4 Interactions between the My Health Record system and My Health Record conformant repositories

3.4.1 ITI-42 Register Document Set – b

Name in the logical service specification: registerDocument

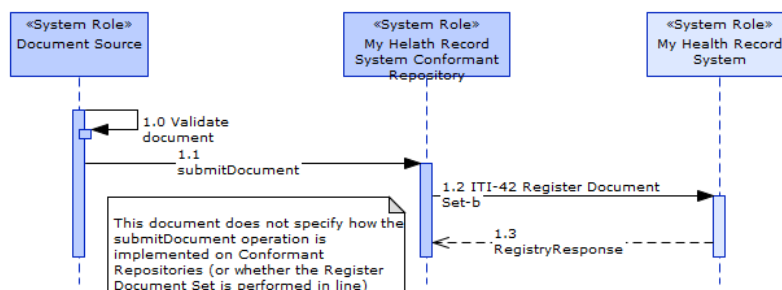


Figure 11 - Register Document Set-b

The Register Document Set – b transaction represents an XDS.b realisation of the registerDocument operation defined within the logical service specification.

This operation allows a Document Repository to register a document with the My Health Record system.

The My Health Record system will implement the XDS.b Document Registry Actor. The XDS.b Document Repository actor will be implemented by My Health Record conformant repositories.

3.4.1.1 Pre-conditions

Conformance points

DEXS-T 38	Within the scope of this section, the Document Repository service SHALL be fulfilled by My Health Record System conformant repositories and the Document Registry Role SHALL be fulfilled by the My Health Record System.
DEXS-T 39	The My Health Record System Conformant Repository SHALL validate the CDA Document against the template the document conforms to.
DEXS-T 40	The identifier of the template this document asserts to conform to SHALL be included within the XSDocumentEntry.formatCode element of the Register Document Request transaction.
DEXS-T 41	Documents which fail validation SHALL NOT be registered in the My Health Record System.

3.4.1.2 Interaction

Conformance points

DEXS-T 42	All conformance points specified in the logical service specification for the registerDocument operation SHALL apply to this operation.
DEXS-T 43	The normative description of the Register Document Set –b operation as provided in section 3.42 of volume 2B of the IHE IT Infrastructure Technical Framework Specification [ITITF-2B] SHALL apply, including any further document or section references therein, with the following conformance points taking precedence:
DEXS-T 44	<ul style="list-style-type: none"> the operation request SHALL include the full “Common Header” as specified in section 4.3.1.
DEXS-T 45	<ul style="list-style-type: none"> the Register Document Set transaction SHALL contain document metadata for exactly one document.
DEXS-T 46	<ul style="list-style-type: none"> the Register Document Set transaction SHALL NOT contain Folder elements.
DEXS-T 47	<ul style="list-style-type: none"> the Register Document set transaction SHALL only support the Document Replace Option and SHALL NOT support the Document Addendum, Document Transformation and Folder Management options (section 3.4.1.61 within [ITITF-2B] provides the definition of these terms).

3.4.1.3 Post-conditions

Conformance points

DEXS-T 48	Upon successful execution, the My Health Record System SHALL register the supplied document metadata and return a status of ‘urn:oasis:names:tc:ebxml-regrep:ResponseStatusType:Success’.
------------------	--

3.4.1.4 Inputs, outputs and faults

In order to support the inclusion of the Common Header and alignment with ATS-5820 Web Services Profile [ATS 5820-2010], the service will use the WSDL provided in Appendix A rather than those specified within the IHE specifications.

Operation data fields	Data structures
Input	lcm:SubmitObjectsRequest
Output	rs:RegistryResponse

Conformance points

DEXS-T 49	The conformance points specified in sections 4.2.1, 4.2.2 and 4.2.3 SHALL apply to this operation.
------------------	---

3.4.1.5 Service faults

The specification for Service Faults associated with XDS.b transactions is provided in section 4.2.6.

3.4.2 ITI-43 Retrieve Document Set

Name in the logical service specification: retrieveRemoteDocument

This operation shall be realised in accordance with section 3.3.2.

3.4.3 removeDocument

Name in the logical service specification: deregisterDocument

This operation shall be realised in accordance with section 3.3.4.

4 Information viewpoint

The information viewpoint is concerned with the representation of information in the system and is relevant for business (i.e. clinical and administrative) stakeholders, interface developers and information modellers.

Note: The error code tables may be subject to extension as the development of the My Health Record system progresses.

4.1 Character set support

The My Health Record system only supports the Latin character set and does not support other international characters or digits.

DEXS-T 124	The Service Invoker SHALL NOT use any non-Latin characters and digits when invoking calls to the My Health Record System.
-------------------	--

4.2 Document Exchange Service Logical Service Specification to IHE XDS.b mapping

The following sub-sections show how the key elements of the information model specified within the logical service specification [DOCX-LSS] are realised using IHE XDS.b data elements.

Where mandatory elements exist within the XDS.b specification and are not present within the logical model, the model is extended to include these additional fields. Optional XDS.b fields which are not present within the logical model are explicitly removed.

Where elements exist within the logical model which do not exist within the XDS.b specification (or the SOAP or Common Headers), the XDS.b specification is extended (there are no such items within this version of the specification).

The IHE XDS specification provides details of the data types and formats for each of the fields described within this section.

4.2.1 Document metadata and XDS.b document entry types

The Document Metadata entity presented within the logical model is realised entirely by the XDSDocumentEntry object. Table 2 shows the mapping between these two entities.

Table 3 - Document Metadata to XDS.b Document Entry mapping

Row #	LSS field	Description	XDS.b field name	Conformance points
1	Authoring Organisation	The name and identifier of the organisation that authored the document.	XDSDocumentEntry.authorInstitution	DEXS-T 126 The XDSDocumentEntry.authorInstitution name field SHALL match the Organisation Name used in the HI Service. ¹
2				DEXS-T 100 The XDSDocumentEntry.authorInstitution field SHALL be set to either: a the HPI-O of the Organisations issued by the HI Service; or b PAI-O issued by the My Health Record System Operator.
3	Authoring Individual	The name and identifier of the individual that authored the document.	XDSDocumentEntry.authorPerson	DEXS-T 128 The XDSDocumentEntry.authorPerson name field SHALL contain the value of the following CDA element (<i>Author name</i>): “/cda:ClinicalDocument/cda:author/cda:assignedAuthor/cda:assignedPerson/cda:name”
4				DEXS-T 129 The XDSDocumentEntry.authorPerson identifier field SHALL contain the value of the following CDA element (<i>Author identifier</i>): “/cda:ClinicalDocument/cda:author/cda:assignedAuthor/cda:assignedPerson/ext:asEntityIdentifier/ext:id”

¹ XPath statements assume the Author is a Person.

Row #	LSS field	Description	XDS.b field name	Conformance points
5				<p>DEXS-T 101 The XDSDocumentEntry.authorPerson field SHALL be set to:</p> <ul style="list-style-type: none"> a the HPI-I of the Individual issued by the HI Service; or b a device identifier approved by the My Health Record System Operator, such as a PAI-D; or c an identifier which uniquely and legally identifies the person and is approved by the My Health Record System Operator, such as the IHI of the Individual.
6	Document Type Code	A code relating to the type of document being submitted.	XDSDocumentEntry.	DEXS-T 130 The XDSDocumentEntry.classCode field SHALL contain the appropriate ClassCode value from Table 3.
7	Document Type Display Name	A display friendly name for the document type.	XDSDocumentEntry.classCodeDisplayName	DEXS-T 131 The XDSDocumentEntry.classCodeDisplayName field SHALL contain the appropriate DocumentName from Table 3.
8	PCEHR Template Identifier	The identifier of the template this document conforms to.	XDSDocumentEntry.formatCode	DEXS-T 58 The XDSDocumentEntry.formatCode field SHALL contain the Template package ID of the Template package to which the CDA Document asserts conformance.
9	Document ID	The identifier of the template this document conforms to.	XDSDocumentEntry.uniqueId	DEXS-T 53 The Document Source SHALL ensure that the XDSDocumentEntry.uniqueId generation algorithm is guaranteed to be globally unique within the My Health Record system. The XDSDocumentEntry.uniqueId SHALL be an OID of format as defined in ITU-T Recommendation X.667 [ITU-X.667].

Row #	LSS field	Description	XDS.b field name	Conformance points
10				<p>DEXS-T 56 The XSDocumentEntry.uniqueId SHALL be set to the OID form of the Document Identifier field within the supplied CDA document. This equivalency SHALL be created according to the following rules:</p> <ul style="list-style-type: none"> a Where the CDA Document Identifier is represented as an OID without an extensions attribute, the XSDocumentEntry.uniqueID field SHALL be set to this value. b Where the CDA Document Identifier is represented as an OID and includes an extension, the XDS DocumentEntry.uniqueID field SHALL be set to a value constructed as [OID]^[extension]. c Where the CDA Document Identifier is represented as a UUID, the XSDocumentEntry.uniqueID field SHALL be set to an OID representation of this UUID. The OID representation SHALL be constructed as specified in section 7 of ITU-T Recommendation X.667 [ITU-X.667]
11	Title	An optional title for the given document.	XSDocumentEntry.title	None
12	Document Creation Time	The time the document was created.	XSDocumentEntry.	<p>DEXS-T 132 The XSDocumentEntry.creationTime field SHALL contain the value of the following CDA element (<i>Effective Time</i>): “/cda:ClinicalDocument/cda:effectiveTime”</p>
13				<p>DEXS-T 122 The XSDocumentEntry.creationTime, XSDocumentEntry.serviceStartTime, XSDocumentEntry.serviceStopTime dates SHOULD use YYYYMMDDhhmmss precision.</p>
14				<p>DEXS-T 123 The XSDocumentEntry.creationTime, XSDocumentEntry.serviceStartTime, XSDocumentEntry.serviceStopTime dates SHALL only allow the following precisions: YYYYMMDD, YYYYMMDDhhmm, and YYYYMMDDhhmmss.</p>

Row #	LSS field	Description	XDS.b field name	Conformance points
15				DEXS-T 144 The XDSDocumentEntry.creationTime Datetime, XDSDocumentEntry.serviceStartTime and XDSDocumentEntry.serviceStopTime values SHALL be in Universal Coordinated Time (UTC) format as per IHE XDS specification requirements.
16	Service Start Time	The datetime the service being performed which caused the document to be created started.	XDSDocumentEntry.serviceStartTime	DEXS-T 133 Unless otherwise stated, the XDSDocumentEntry.serviceStartTime field SHALL contain the value of the following CDA element (<i>EncompassingEncounterEffectiveTime</i>) using low value if available: "/cda:ClinicalDocument/cda:componentOf/cda:encompassingEncounter/cda:effectiveTime" Otherwise the CDA element (<i>Effective Time</i>) SHALL be used, "/cda:ClinicalDocument/cda:effectiveTime/@value"
17				DEXS-T 134 If the document is of type Specialist Letter, then XDSDocumentEntry.serviceStartTime field SHALL contain the value of the following CDA element (<i>Effective Time</i>): "/cda:ClinicalDocument/cda:effectiveTime/@value"
18				DEXS-T 145 If the document is of type Discharge Summary, then XDSDocumentEntry.serviceStartTime field SHALL contain the Admittance Date. "/cda:ClinicalDocument/cda:componentOf/cda:encompassingEncounter/cda:effectiveTime/low/@value"
19				DEXS-T 135 If the document is of type eHealth Prescription Record, then XDSDocumentEntry.serviceStartTime field SHALL contain the value of the following CDA element (<i>Author time</i>): /cda:ClinicalDocument/cda:author/cda:time/@value

Row #	LSS field	Description	XDS.b field name	Conformance points
20				<p>DEXS-T 136 If the document is of type eHealth Dispense Record, then XSDDocumentEntry. serviceStartTime field SHALL contain the value of the following CDA element (<i>Supply time</i>):</p> <p>“/cda:ClinicalDocument/cda:component/cda:structuredBody/cda:component/cda:section[cda:code/@code='102.16210']/cda:entry/cda:substanceAdministration/cda:entryRelationship/cda:supply/cda:effectiveTime/@value”</p>
21				<p>DEXS-T 137 If the document is of type Pathology Report, then the XSDDocumentEntry. serviceStartTime field SHALL contain the value of the following CDA element (Specimen Collection Date) using the earliest date:</p> <p>“/cda:ClinicalDocument/cda:component/cda:structuredBody/cda:component/cda:section[cda:code/@code='101.20018']/cda:component/cda:section[cda:code/@code='102.16144']/cda:entry/cda:observation/cda:entryRelationship/cda:observation[cda:code/@code='102.16156']/cda:effectiveTime/@value”</p>
22				<p>DEXS-T 150 If the document is of type Diagnostic Imaging Report, then the XSDDocumentEntry. serviceStartTime field SHALL contain the value of the following CDA element (<i>Imaging Date</i>) using the earliest date recorded in the Diagnostic Imaging Report:</p> <p>“/cda:ClinicalDocument/cda:component/cda:structuredBody/cda:component/cda:section[cda:code/@code='101.16945']/cda:component/cda:section[cda:code/@code='102.16145']/cda:entry/cda:observation/cda:entryRelationship/cda:act/cda:entryRelationship/cda:observation/cda:effectiveTime/@value”</p>

Row #	LSS field	Description	XDS.b field name	Conformance points
23				<p>DEXS-T 152 If the document is of type Advance Care Planning Document, then XDSDocumentEntry. serviceStartTime field SHALL contain the value of the following CDA element:</p> <p><i>"/ClinicalDocument/component/structuredBody/component/section[code/@code='101.16973']/entry/act[code/@code='102.16971']/author/time/@value"</i></p> <p>If this field is unavailable then serviceStartTime field SHALL contain the value of the following CDA element:</p> <p><i>"/ClinicalDocument/component/structuredBody/component/section[code/@code='101.16973']/entry/act[code/@code='102.16971']/author/time/low/@value"</i></p> <p>if neither of these fields exist serviceStartTime SHALL contain the value of the following CDA element:</p> <p><i>"/ClinicalDocument/component/structuredBody/component/section[code/@code='101.16973']/entry/act[code/@code='102.16971']/author/time/high/@value"</i></p>
24				<p>Also refer to conformance points DEXS-T 122 and DEXS-T 123 and DEXS-T 144 in this table (rows 13 to 15).</p>
25	Service Stop Time	<p>The datetime the service being performed which caused the document to be created stopped.</p> <p>The Service Stop Time may be set to the same value as the Service Start Time in order to indicate the datetime of an event.</p>	XDSDocumentEntry. serviceStopTime	<p>DEXS-T 138 Unless otherwise stated, the XDSDocumentEntry. serviceStopTime field SHALL contain the value of the following CDA element (<i>EncompassingEncounterEffectiveTime</i>) using high value if available:</p> <p><i>"/cda:ClinicalDocument/cda:componentOf/cda:encompassingEncounter/cda:effectiveTime"</i></p> <p>Otherwise the CDA element (<i>Effective Time</i>) SHALL be used,</p> <p><i>"/cda:ClinicalDocument/cda:effectiveTime/@value"</i></p>

Row #	LSS field	Description	XDS.b field name	Conformance points
26				<p>DEXS-T 139 If the document is of type Specialist Letter, then XSDocumentEntry. serviceStopTime field SHALL contain the value of the following CDA element (<i>Effective Time</i>):</p> <p>"/cda:ClinicalDocument/cda:effectiveTime/@value"</p>
27				<p>DEXS-T 146 If the document is of type Discharge Summary, then XSDocumentEntry. serviceStopTime field SHALL contain the value of the discharge date of the individual.</p> <p>"/cda:ClinicalDocument/cda:componentOf/cda:encompassingEncounter/cda:effectiveTime/high/@value"</p>
28				<p>DEXS-T 140 If the document is of type eHealth Prescription Record, then XSDocumentEntry. serviceStopTime field SHALL contain the value of the following CDA element (<i>Author time</i>):</p> <p>"/cda:ClinicalDocument/cda:author/cda:time/@value"</p>
29				<p>DEXS-T 141 If the document is of type eHealth Dispense Record, then XSDocumentEntry. serviceStopTime field SHALL contain the value of the following CDA element (<i>Supply time</i>):</p> <p>"/cda:ClinicalDocument/cda:component/cda:structuredBody/cda:component/cda:section[cda:code/@code='102.16210']/cda:entry/cda:substanceAdministration/cda:entryRelationship/cda:supply/cda:effectiveTime/@value"</p>
30				<p>DEXS-T 142 If the document is of type Pathology Report, then the XSDocumentEntry. serviceStopTime field SHALL contain the value of the following CDA element (<i>Specimen Collection Date</i>) using the latest date recorded:</p> <p>"/cda:ClinicalDocument/cda:component/cda:structuredBody/cda:component/cda:section[cda:code/@code='101.20018']/cda:component/cda:section[cda:code/@code='102.16144']/cda:entry/cda:observation/cda:entryRelationship/cda:observation[cda:code/@code='102.16156']/cda:effectiveTime/@value"</p>

Row #	LSS field	Description	XDS.b field name	Conformance points
31				<p>DEXS-T 147 If the document is of type Diagnostic Imaging Report, then the XDSDocumentEntry. serviceStopTime field SHALL contain the value of the following CDA element (<i>Imaging Date</i>) using the latest date recorded:</p> <pre>"/cda:ClinicalDocument/cda:component/cda:structuredBody/cda:component/cda:section[cda:code/@code='101.16945']/cda:component/cda:section[cda:code/@code='102.16145']/cda:entry/cda:observation/cda:entryRelationship/cda:act/cda:entryRelationship/cda:observation/cda:effectiveTime/@value"</pre>
32				<p>DEXS-T 153 If the document is of type Advance Care Planning Document, then XDSDocumentEntry. serviceStopTime field SHALL contain the value of the following CDA element:</p> <pre>"/ClinicalDocument/component/structuredBody/component/section[code/@code='101.16973']/entry/act[code/@code='102.16971']/author/time/@value"</pre> <p>If this field is unavailable then serviceStopTime field SHALL contain the value of the following CDA element:</p> <pre>"/ClinicalDocument/component/structuredBody/component/section[code/@code='101.16973']/entry/act[code/@code='102.16971']/author/time/high/@value"</pre> <p>if neither of these fields exist serviceStopTime SHALL contain the value of the following CDA element:</p> <pre>"/ClinicalDocument/component/structuredBody/component/section[code/@code='101.16973']/entry/act[code/@code='102.16971']/author/time/low/@value"</pre>
33				<p>Also refer to conformance points DEXS-T 122 and DEXS-T 123 and DEXS-T 144 in this table. (rows 13 to 15).</p>

Row #	LSS field	Description	XDS.b field name	Conformance points
34	Document Hash	A SHA-1 hash representation of the CDA package. This field is mandatory for ITI-42 document registrations.	XDSDocumentEntry.hash	DEXS-T 5 All conformance points specified in the <i>My Health Record Document Exchange Service Logical Service Specification</i> for the submitDocument operation SHALL apply to this operation, with the following conformance point taking precedence: a The XDSDocumentEntry.hash field SHALL be generated using the SHA-1 hashing algorithm.
35				DEXS-T 97 The XDSDocumentEntry.hash field SHALL be set for ITI-42 operations.
36				DEXS-T 102 The XDSDocumentEntry.hash field SHALL be generated using the SHA-1 hashing algorithm for ITI-42 operations.
37				DEXS-T 148 The Document Hash for Medicare CDA packages (Australian Childhood Immunisation Register, Australian Organ Donor Register, Medicare/DVA Benefits Report, Pharmaceutical Benefits Report) SHALL have the Document Hash value of an empty file of size 0. This is because these documents are generated at the time of request.
38				DEXS-T 149 Connecting systems SHALL NOT validate the Document Hash of Medicare CDA packages (Australian Childhood Immunisation Register, Australian Organ Donor Register, Medicare/DVA Benefits Report, Pharmaceutical Benefits Report) before opening the CDA packages.
39	Keyword	One or more keywords which are related to the document submission. Both these fields must be excluded from submission.	XDSDocumentEntry.eventCodeList	DEXS-T 95 The following XDSDocumentEntry fields SHALL NOT be included within the submission: eventCodeList, eventCodeListDisplayName, parentDocumentRelationship, parentDocumentId.
40			XDSDocumentEntry.eventCodeListDisplayName	See DEXS-T 95 directly above.

Row #	LSS field	Description	XDS.b field name	Conformance points
41	Healthcare Facility Type Code	A code identifying the type of healthcare facility where the event relating to this document submission request initiated.	XDSDocumentEntry.healthcareFacilityTypeCode	This field is not taken from the CDA document. It is provided by the source client system. See Appendix B Code sets in the <i>My Health Record Document Exchange Logical Service Specification</i> [DOCX-LSS].
42	Healthcare Facility Type Name	A display friendly name for the above code.	XDSDocumentEntry.healthcareFacilityTypeCodeDisplayName	This field is not taken from the CDA document. It is provided by the source client system. See Appendix B Code sets in the <i>My Health Record Document Exchange Logical Service Specification</i> [DOCX-LSS].
43	Clinical Speciality Code	A code identifying the clinical specialty where the event relating to this document submission request initiated.	XDSDocumentEntry.practiceSettingCode	This field is not taken from the CDA document. It is provided by the source client system. See Appendix B Code sets in the <i>My Health Record Document Exchange Logical Service Specification</i> [DOCX-LSS].
44	Clinical Speciality Display Name	A display friendly name for the above specialty.	XDSDocumentEntry.practiceSettingCodeDisplayName	This field is not taken from the CDA document. It is provided by the source client system. See Appendix B Code sets in the <i>My Health Record Document Exchange Logical Service Specification</i> [DOCX-LSS].
45	N/A	This field is not present in the LSS definition of the Document Metadata as it is in the Common Header. The value from the Common Header SHOULD be replicated into this field.	XDSDocumentEntry.sourcePatientId	DEXS-T 143 Unless otherwise stated, the XDSDocumentEntry.sourcePatientId field SHALL contain the data from the following CDA element (<i>16-digit IHI number</i>): “/cda:ClinicalDocument/cda:recordTarget/cda:patientRole/cda:patient/ext:asEntityIdentifier[@classCode='IDENT']/ext:id[@assigningAuthorityName='IHI']/@root” Formatted as per the XDS Specification [IHE_TS].
46				DEXS-T 51 The XDSDocumentEntry.sourcePatientId SHALL contain the 16-digit IHI number provided within the PCEHR Header.
47				DEXS-T 57 The XDSDocumentEntry.sourcePatientId SHALL be identical to the XDSDocumentEntry.patientId field within the supplied CDA Document.

Row #	LSS field	Description	XDS.b field name	Conformance points
48	N/A	This mandatory XDS.b field is not supported by the My Health Record System. It SHALL be set to a value of 'NA'.	XDSDocumentEntry.confidentialityCode	DEXS-T 52 The XDSDocumentEntry.confidentialityCode SHALL be set to 'NA'.
49	N/A	This field is not required by the Logical Model presented within the LSS but is a mandatory field within XDS. This field is not required by the Logical Model presented within the LSS but is a mandatory field within XDS.	XDSDocumentEntry.typeCode	DEXS-T 54 The XDSDocumentEntry.typeCode SHALL be set to the same value as the XDSDocumentEntry.classCode field. With the exception of an <i>Advance Care Planning Document</i> .
50	N/A	This field is not required by the Logical Model presented within the LSS but is a mandatory field within XDS. This field SHALL be set to the same value as that provided in the typeCodeDisplayName field.	XDSDocumentEntry.typeCodeDisplayName	DEXS-T 55 The XDSDocumentEntry.typeCodeDisplayName SHALL be set to the value specified in the TypeCodeDisplayName column in Table 3.
51	Common Header. IHI Number	This value SHALL be set to the 16 digits that is contained within the XDSDocumentEntry.sourcePatientId.	XDSDocumentEntry.patientId	Refer to conformance points DEXS-T 57 in this table (row 47).
52	N/A	This field is not required by the Logical Model presented within the LSS but is a mandatory field within XDS. Set to a fixed value of 'en-AU'.	XDSDocumentEntry.languageCode	DEXS-T 59 The XDSDocumentEntry.languageCode field SHALL be set to a fixed value of 'en-AU'.

Row #	LSS field	Description	XDS.b field name	Conformance points
53	N/A	The MIME type of the document provided. This field is set to a fixed value of 'application/zip'.	XDSDocumentEntry. mimeType	DEXS-T 93 The XDSDocumentEntry.mimeType field SHALL be set to a fixed value of 'application/zip'.
54	N/A	The symbolic ID of the document provided. (The My Health Record system creates the actual value for symbolic fields) This field is set to a fixed value of 'DOCUMENT_SYMBOLICID_01'.	XDSDocumentEntry. entryUUID	DEXS-T 94 The XDSDocumentEntry.entryUUID field SHALL be set to a symbolic id of "DOCUMENT_SYMBOLICID_01".
55	N/A	The size of the CDA package. This field is mandatory for ITI-42 document registrations.	XDSDocumentEntry. size	DEXS-T 96 The XDSDocumentEntry.size field SHALL be set for ITI-42 operations.
56	N/A			DEXS-T 151 The size of Medicare CDA packages (Australian Childhood Immunisation Register, Australian Organ Donor Register, Medicare/DVA Benefits Report, Pharmaceutical Benefits Report) SHALL have the size of 0. This is because these documents are generated at the time of request.

Table 4 – XSDocumentEntry Document Type and Class Code value set

Coding System	TypeCode ClassCode	ClassCodeDisplayName	TypeCodeDisplayName	Retrievable
LOINC	60591-5	Shared Health Summary	Shared Health Summary	Yes
LOINC	57133-1	e-Referral	e-Referral	Yes
LOINC	51852-2	Specialist Letter	Specialist Letter	Yes
LOINC	18842-5	Discharge Summary	Discharge Summary	Yes
LOINC	34133-9	Event Summary	Event Summary	Yes
NCTIS	100.16650	Pharmaceutical Benefits Report	Pharmaceutical Benefits Report	Yes
NCTIS	100.16659	Australian Immunisation Register	Australian Immunisation Register	Yes
NCTIS	100.16644	Medicare/DVA Benefits Report	Medicare/DVA Benefits Report	Yes
NCTIS	102.16671	Australian Organ Donor Register	Australian Organ Donor Register	Yes
NCTIS Data Components ²	100.16681	Personal Health Note	Personal Health Note	Yes
NCTIS Data Components ²	100.16685	Personal Health Summary	Personal Health Summary	Yes
NCTIS Data Components ²	100.16696	Advance Care Directive Custodian Record	Advance Care Directive Custodian Record	Yes
NCTIS Data Components ²	100.16764	eHealth Prescription Record	eHealth Prescription Record	Yes
NCTIS Data Components ²	100.16765	eHealth Dispense Record	eHealth Dispense Record	Yes
NCTIS Data Components ²	100.16957	Diagnostic Imaging Report	Diagnostic Imaging Report	Yes
NCTIS Data Components ²	100.32001	Pathology Report	Pathology Report	Yes

² All NCTIS and NCTIS Data Components use coding system with arc of 1.2.36.1.2001.1001.101. Medicare Documents are fixed with the description of "NCTIS".

Coding System	TypeCode ClassCode	ClassCodeDisplayName	TypeCodeDisplayName	Retrievable
NCTIS Data Components ²	100.16870	Consumer Entered Measurements	Consumer Entered Measurements	Yes
NCTIS Data Components ²	100.16919	Child Parent Questionnaire	Child Parent Questionnaire	Yes
NCTIS Data Components ²	TypeCode: 100.16998 ClassCode: 100.16975	Advance Care Information	Advance Care Planning Document	Yes
NCTIS Data Components ²	TypeCode: 100.32016 ClassCode: 100.16975	Advance Care Information	Goals of Care Document	Yes
NCTIS Data Components ²	100.32002	Medicines View	Medicines View	No
NCTIS Data Components ²	100.16767	Medicare Overview	Medicare Overview	No
NCTIS Data Components ²	100.32026	Pathology Overview	Pathology Overview	No
NCTIS Data Components ²	100.32025	Diagnostic Imaging Overview	Diagnostic Imaging Overview	No

Conformance points

DEXS-T 50	Any XDSDocumentEntry fields which are not shown in the XDS.b Field Name column of Table 2 SHOULD NOT be provided by connecting systems and SHALL be ignored by the My Health Record System.
DEXS-T 98	The XDSDocumentEntry.repositoryUniqueId field SHALL be set for ITI-42 operations.
DEXS-T 99	All conformance points specified in the <i>My Health Record Document Exchange Service Logical Service Specification</i> for the DocumentMetadata entity SHALL apply, including any further document or section references therein, with the following conformance points (found in this document) taking precedence: <ul style="list-style-type: none"> • DEXS-T 100 (page 27) • DEXS-T 101 (page 28) • DEXS-T 102 (page 35).
DEXS-T 117	The CDA Package SHALL be created according to the XDM –ZIP representation [CDA_PKG].

DEXS-T 125	Attachments included in the CDA Package SHALL be located in the same folder as the CDA_ROOT.XML for the purpose of sending to the My Health Record System.
DEXS-T 120	The XDSDocument SHALL be provided using the Clinical Package specification [CLN_PKG] and the Signed CDA Package profile [CDA_PKG].
DEXS-T 121	The CDA Package SHALL have exactly one Signature.

Informative note

The IHE XDS specification requires the usage of the Coordinated Universal Time (UTC) standard for XDS datetimes.

4.2.2 Submission metadata and XDS.b submission set types

The Submission Metadata entity presented within the logical model is realised entirely by the XDSSubmissionSet object. Table 4 below shows the mapping between these two entities. The XDSSubmissionSet duplicates much of the data which is already present within the XDSDocumentEntry (which is mandated to be represented as a singular occurrence within this specification).

Table 5 - Submission metadata to XDS.b submission set mapping

Row #	LSS field	Description	XDS.b field name	Conformance points
1	Submitter Type	This value is realised within the My Health Record Header.	N/A	None
2	SubmissionDateTime	The date and time that the document was submitted to the My Health Record system.	XDSSubmissionSet. submissionTime	None
3	Document Metadata. Authoring Individual	This value SHALL be set to the same value as the authorPerson specified in the XDSDocumentEntry.	XDSSubmissionSet. authorPerson	DEXS-T 62 The value provided within the XDSSubmissionSet.authorPerson entity SHALL be identical to the value provided within the XDSDocumentEntry.authorPerson entity.

Row #	LSS field	Description	XDS.b field name	Conformance points	
4	Document Metadata. Authoring Organisation	This value SHALL be set to the same value as the authorInstitution specified in the XSDDocumentEntry.	XDSSubmissionSet.authorInstitution	DEXS-T 63	The value provided within the XDSSubmissionSet.authorInstitution entity SHALL be identical to the value provided within the XSDDocumentEntry.authorInstitution entity.
5	N/A	This value SHALL be set to the same value as the classCode specified in the XSDDocumentEntry.	XDSSubmissionSet.contentTypeCode	DEXS-T 64	The value provided within the XDSSubmissionSet.contentTypeCode entity SHALL be identical to the value provided within the XSDDocumentEntry.classCode entity.
6	N/A	This SHALL be set to the same value as the classCodeDisplayName specified in the XSDDocumentEntry.	XDSSubmissionSet.contentTypeCodeDisplayName	DEXS-T 65	The value provided within the XDSSubmissionSet.contentTypeCodeDisplayName entity SHALL be identical to the value provided within the XSDDocumentEntry.classCodeDisplayName entity.
7	N/A	This field SHALL be populated using a symbolic identifier with a fixed value of 'SUBSET_SYMBOLICID_01'.	XDSSubmissionSet.entryUUID	DEXS-T 61	The XDSSubmissionSet.entryUUID SHALL have a symbolic identifier of 'SUBSET_SYMBOLICID_01' when used within the ITI-41 Provide & Register Document Set-b and ITI-42 RegisterDocument Set-b transactions.
8	Common Header. IHI Number	This value SHALL be set to the same value as the sourcePatientId specified in the XSDDocumentEntry.	XDSSubmissionSet.patientId	None	

Row #	LSS field	Description	XDS.b field name	Conformance points
9	N/A	This is not required by the Logical Model but is mandatory field within XDS. This element will be populated using the OID representation of the XDSDocumentEntry.authorInstitution field.	XDSSubmissionSet. sourceId	None
10	N/A	A unique identifier for the submission set created by the source. This is not required by the Logical Model but is mandatory field within XDS. This field SHALL be an OID.	XDSSubmissionSet. uniqueId	None

Conformance points

DEXS-T 60	Any XDSSubmissionSet fields which are not shown in the XDS.b Field Name column of Table 4 above SHOULD NOT be provided by connecting systems and SHALL be ignored by the My Health Record System.
DEXS-T 103	All conformance points specified in the <i>My Health Record Document Exchange Service Logical Service Specification</i> for the DocumentMetadata entity SHALL apply, including any further document or section references therein, with the following conformance points taking precedence:
DEXS-T 104	<ul style="list-style-type: none"> the value provided within the XDSSubmissionSet.patientID entity SHALL be identical to the value provided within the XDSDocumentEntry.sourcePatientId entity
DEXS-T 105	<ul style="list-style-type: none"> the value provided within the XDSSubmissionSet. uniqueId entity SHALL be identical to the value provided within the XDSDocumentEntry. uniqueId entity.

4.2.3 Document version information and XDS.b association types

Table 6 - Document version information to XDS.b association mapping

LSS Field	Description	XDS.b Field Name
Previous Version Document ID	The unique identifier of the document which this document replaces.	targetObject A reference to the XSDocumentEntry.UniqueID already stored in XDS.b Registry provided by the My Health Record system. The XDS meta data must be a UUID. If a Document ID is used, it must be an OID representation form.
Document Metadata	A reference to the document entry which will create a new document or replace the previous document (this will typically be part of the same submission as the association).	sourceObject The id of XSDocumentEntry provided in the submission which replaces the previously stored document.
N/A	The type of association.	Association Type This shall have a value of 'urn:ihe:iti:2007:AssociationType:RPLC' (Replace).

Conformance points

DEXS-T 67	The XDS.b Association construct SHALL be used to manage document versioning.
DEXS-T 68	The XDS.b Association Type SHALL be set to 'urn:ihe:iti:2007:AssociationType:RPLC' to supersede a document.
DEXS-T 118	<p>The XDS.b Association targetObject field name SHALL contain either the XSDocumentEntry.uniqueID set to this value OR the Document ID, as explained below:</p> <ol style="list-style-type: none"> 1 If the XSDocumentEntry.uniqueID is used as the unique targetObject, then the format SHALL be UUID. 2 If the UUID format for the XSDocumentEntry.uniqueID is used for the sourceObject, the superseding of a document SHALL first use the ITI-18 operation (to retrieve the My Health Record XDS Metadata EntryID) before superseding the original document. 3 If the Document Id is used as the unique targetObject, then the format SHALL be one of the following: <ol style="list-style-type: none"> a The Document Identifier SHALL be represented as an OID without an extensions attribute; or b The Document Identifier SHALL be represented as an OID and include an extension constructed as [OID]^[extension]; or c The Document Identifier SHALL be represented as an OID representation of this UUID. The OID representation SHALL be constructed as specified in section 7 of [ITU-X.667].

Informative note

When the previous version Document ID OID is used for the targetObject, the ITI-18 Registry Stored Query (find documents) operation is not required. This provides a mechanism for superseding a document in one ITI-41 Provide & Register Document Set–b operation by passing the Document Id in the metadata targetObject field and using the following Association type: ‘urn:ihe:iti:2007: AssociationType:RPLC’ (for ‘Replace’).

4.2.4 Document retrieval request and XDS.b retrieve document set request types

Table 7 - Document Retrieval Request to XDS.b Retrieve Document Set Request

LSS Field	Description	XDS.b Field Name
Requested Document ID	The identifier of the document being retrieved.	documentUniqueld
N/A	This value is not supported within the Logical Model but is required by IHE XDS.b. This is the identifier of the XDS Repository containing the document. The value shall be set to the value returned by a call to RegistryStoredQuery (or provided by a view).	repositoryUniqueld

Conformance points

DEXS-T 69	Any XDS.b Retrieve Document Set Request fields which are not shown in the XDS.b Field Name column of Table 6 above SHOULD NOT be provided by connecting systems and SHALL be ignored by the My Health Record System.
DEXS-T 70	The repositoryUniqueld SHALL be set to the value retrieved from the XDS.b Registry.
DEXS-T 71	The Document Consumer SHALL retrieve all documents directly from the My Health Record System (regardless of the value provided within the repositoryUniqueld field).

4.2.5 FindDocumentsRequest and XDS.b registry stored queries

The XDS.b Specification uses a set of pre-defined parameterised stored queries to support searching for documents. The Document Consumer provides the name of the query to be executed along with the parameters required by the query. These parameters may include document ClassCodes if specific document types are required.

Section 3.18 of volume 2B of the IHE Specification [ITITF-2B] provides a definition of the queries supported and the associated data types.

For reference, an overview of the document type/date filter conditions that result in a My Health Record view being returned in the response have been included below.

Table 8 - Overview of Conditions Resulting in the Insertion of a My Health Record Consolidated View within the `getDocumentList` response

Filter Condition (Document/Date)	Medicare Overview	Medicines View	Pathology	Diagnostic Imaging
Shared Health Summary		Returned		
e-Referral		Returned		
Specialist Letter		Returned		
Discharge Summary		Returned	Returned	Returned
Event Summary		Returned		
Pharmacist Shared Medicines List		Returned		
Pharmaceutical Benefits Report	Returned**	Returned		
Australian Immunisation Register	Returned**			
Australian Childhood Immunisation Register	Returned**			
Medicare/DVA Benefits Report	Returned**			
Australian Organ Donor Register	Returned**			
Personal Health Note				
Personal Health Summary		Returned		
Advance Care Directive Custodian Record				
eHealth Prescription Record		Returned		
eHealth Dispense Record		Returned		
Diagnostic Imaging Report				Returned
Pathology Report			Returned	

Filter Condition (Document/Date)	Medicare Overview	Medicines View	Pathology	Diagnostic Imaging
Consumer Entered Measurements				
Child Parent Questionnaire				
Advance Care Information				
Consumer Entered Measurements				
Medicare Overview	Returned**			
Medicines View		Returned		
Date Filtered Only Request (No Document Type)	Returned**	Returned	Returned	Returned
No Filter (No Date/No Document Type)	Returned**	Returned	Returned	Returned
All Document Types	Returned**	Returned	Returned	Returned

*Returned** indicates that the Medicare Overview will be returned if Medicare Documents exist for the individual.*

Order of Views: All the views are to be displayed in the top section of the Document List which are the first five items of the View. The display order will be: Medicines View, Pathology View, Diagnostic Imaging View, Medicare Overview Last 12 months, Medicare Overview All Available.

4.2.6 Service faults

The XDS.b mechanism for returning the details of errors which occur during XDS.b transactions is provided in section 4.1.13 of volume 3 within the IHE IT Infrastructure specification [ITITF-3].

An XDS.b RegistryResponse or AdHocQueryResponse may return a RegistryError element.

An XDS.b RegistryError element is made up of an:

- errorCode – The code describing the type of error.
- codeContext – A detailed description of the error.
- location – name of system responsible for raising the error. This is set to ‘PCEHR Interface’.
- severity – The severity of the error.
 - urn:oasis:names:tc:ebxml-regrep:ErrorSeverityType:Error
 - or
 - urn:oasis:names:tc:ebxml-regrep:ErrorSeverityType:Warning

Section 4.4.3 XDS.b responses defines specific My Health Record responses returned.

Conformance points

DEXS-T 72	The RegistryResponse or AdHocQueryResponse element SHALL return a status code of 'urn:oasis:names:tc:ebxml-regrep:ResponseStatusType:Failure' upon error and SHALL include a RegistryError element but no response body.
DEXS-T 73	The service SHALL return a status code of 'urn:oasis:names:tc:ebxml-regrep:ResponseStatusType:PartialSuccess' where the request was processed successfully but with a warning. This response SHALL include a registryError element and a response body.
DEXS-T 74	The errorCode returned SHALL be taken from table 4.1-11 within volume 3 of the IHE IT Infrastructure specification [ITITF-3].

4.2.7 removeDocument message operation message types

Table 9 - RemoveDocumentRequest

Element Name	Type	Cardinality	Remarks
RemoveDocument		1..1	
DocumentID	xs:string	1..1	Unique id for the message. E.g.: uuid:95b48e68-5dfc-4dbd-ab05-aaa855cec03f
reasonForRemoval	xs:string	1..1	The reason for removing the document. The accepted values for this field are: <ul style="list-style-type: none"> • Withdrawn • ElectToRemove • IncorrectIdentity
/RemoveDocument			

Table 10 - RemoveDocumentResponse

Element Name	Type	Cardinality	Remarks
RemoveDocumentResponse		1..1	
responseStatus	responseStatusType	1..1	The status of the service call.
/RemoveDocumentResponse			

4.3 Other data elements

4.3.1 Common Header

The PCEHR Common Header specified within the logical service specification [DOCX-LSS] is realised in this specification using the following SOAP Headers within the web service call. These are:

- WS-Addressing Header
- PCEHRHeader
- Transmission Timestamp
- Transmission Signature.

4.3.1.1 WS-Addressing Header (Request)

Table 11 - WS-Addressing Header (Request)

Element Name	Type	Cardinality	Remarks
WS Addressing		1..1	
MessageId	UUID	1..1	Unique id for the message. E.g.: uuid:95b48e68-5dfc-4dbd-ab05-aaa855cec03f
To	anyURI	1..1	Value: e.g. http://www.w3.org/2005/08/addressing/anonymous
Action	anyURI	1..1	Identifier (full namespace) of the virtual service being invoked.
/WS Addressing			

4.3.1.2 WS-Addressing Header (Response)

Table 12 - WS-Addressing Header (Response)

Element Name	Type	Cardinality	Remarks
WS Addressing		1..1	
MessageId	UUID	1..1	Unique id for the message. E.g. uuid:95b48e68-5dfc-4dbd-ab05-aaa855cec03f
RelatesTo	UUID	1..1	MessageId of the original service request.
/WS Addressing			

Conformance points

DEXS-T 75	The service provider SHALL set these values in accordance with ATS 5820-2010 Section 6 – Metadata [ATS 5820-2010].
------------------	---

4.3.2 PCEHRHeader (Request)

PCEHRHeader is used for all interactions with the My Health Record System.

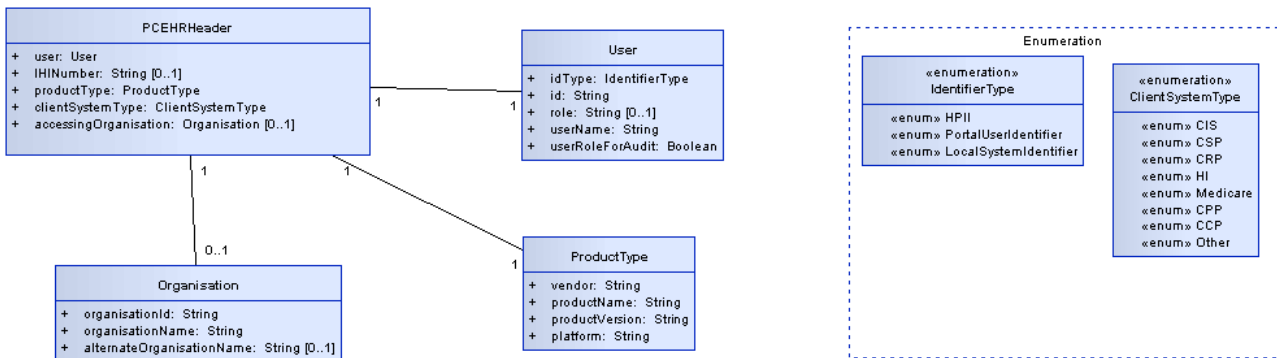


Figure 12 – PCEHRHeader

Table 13 - PCEHRHeader

Element Name	Type	Cardinality	Remarks
PCEHRHeader		1..1	
User		1..1	
IDType	String	1..1	Values ("HPII", "PortalUserIdentifier", "LocalSystemIdentifier")
ID	String	1..1	My Health Record System identity, 16 digit HPI-I number or Other User ID
role	String	0..1	Optional User Role
username	String	1..1	Username
useRoleForAudit	Boolean	1..1	if true the My Health Record System will use role as the user name for audit, else the My Health Record System will use username as the user name for audit
/User			
ihiNumber	String	0..1	Digital health record individual's 16 digit IHI number
productType		1..1	
vendor	String	1..1	client system's vendor name
productName	String	1..1	client system's product name
productVersion	String	1..1	client system's product version

Element Name	Type	Cardinality	Remarks
platform	String	1..1	client system's platform
/productType			
clientSystemType	String	1..1	Values ("CCP","CPP", "CIS", "CSP", "CRP", "HI", "Medicare", "Other")
accessingOrganisation		0..1	
organisationId	String	1..1	The 16 digit Healthcare Organisation Identifier (HPI-O) or approved alternative (a unique identifier issued by the My Health Record System Operator e.g. a PAI-O).
organisationName	String	1..1	Organisation Name
alternateOrganisationName	String	0..1	Alternate Organisation Name
/accessingOrganisation			
/PCEHRHeader			

Conformance points

DEXS-T 76	The Service Invoker SHALL set the IHINumber to the IHI of the Individual who owns the record in the My Health Record System.
DEXS-T 77	The Service Invoker SHALL set the accessingOrganisation to the identifier of the organisation attempting to access the digital health record.
DEXS-T 78	The Service Invoker SHALL set the user.id to either: <ul style="list-style-type: none"> a the 16-digit HPI-I of the provider attempting to access the digital health record (where this is known) b or, alternatively, a local identifier of the provider/support operator attempting to access the digital health record.
DEXS-T 79	The Service Invoker SHALL set the productType.vendor to the vendor name of the client system.
DEXS-T 80	The Service Invoker SHALL set the productType.productName to the product name of the client system.
DEXS-T 81	The Service Invoker SHALL set the productType.productVersion to the product version of the client system.
DEXS-T 82	The Service Invoker SHALL set the productType.platform to the client system vendor.

4.3.3 Transmission timestamp

Table 14 - SOAP Header timestamp

Element Name	Type	Cardinality	Remarks
timestamp		1..1	
created	dateTime	1..1	Time at SOAP message creation. Inclusive of Date, Time and UTC Timezone. E.g. 2011-10-25T03:06:13Z
expires	dateTime	0..1	For future use.
/timestamp			

4.3.4 Transmission signature

Table 15 - Transmission Signature in SOAP Header

Element Name	Type	Cardinality	Remarks
signature			1..1
signature	ds:signature	1..1	A signed attestation of key SOAP message elements using the ATS 5821 specification.
/signature			

Conformance points

DEXS-T 106	The element signed by the Transmission Signature by all parties SHALL include a SOAP Body Element.
DEXS-T 107	The element signed by the Transmission Signature by the Service Invoker SHALL also include a PCEHR Header element (as defined in section 4.3.1).
DEXS-T 108	The element signed by the Transmission Signature SHOULD include a Transmission Timestamp element (as defined in section 4.3.4).
DEXS-T 109	The Service Invoker and Service Provider SHALL calculate the ds:DigestValue as specified in “Section 4. XML Signature Profile” of ATS 5821-2010 prior to the application of MTOM/XOP.
DEXS-T 110	The ds:SignedInfo element type SHALL be realised in conformance with “Section 4. XML Signature Profile” as specified in ATS 5821-2010.
DEXS-T 111	The fragment identifier used within the ds:Reference element, specified in “Section 4. XML Signature Profile” of ATS 5821-2010 SHALL refer to the “ID” attribute specified in section 3.3 of W3C-XML-1.1 [W3C-XML-1.1] of the element referenced.
DEXS-T 112	The ds:signature element type SHALL be realised in conformance with “Section 4. XML Signature Profile” as specified in ATS 5821-2010.

4.4 My Health Record System responses

The My Health Record System responses are listed in this section. The returned response to a service call may contain the following response types:

- Common response status (section 4.4.1),
- Standard SOAP faults (section 4.4.2), or
- XDS.b responses (section 4.4.3).

Conformance points

DEXS-T 83	<p>The Service Provider SHALL set the appropriate response code as per below:</p> <ol style="list-style-type: none"> All services SHOULD return the appropriate codes from Table 16 General responses and Table 18 SOAP responses removeDocument service SHALL return appropriate additional codes from Table 17 removeDocument responses. ITI-18 Registry Stored Query service SHALL return appropriate additional codes from Table 19 ITI-18 response. ITI-41 Provide & Register Document Set – b service SHALL return appropriate additional codes from Table 21 ITI-42 response. ITI-42 Register Document Set - b SHALL return appropriate additional codes from Table 22 ITI-43 response. ITI-43 Retrieve Document Set service SHALL return appropriate additional codes from Table 22 ITI-43 response.
------------------	---

4.4.1 Common response status

The My Health Record System supports the common response status.




Figure 13 – ResponseStatus

Table 16 - ResponseStatus Responses

Element Name	Type	Cardinality	Remarks
ResponseStatus		1..1	
code	String	1..1	Status Code for the result of the transaction
description	String	1..1	Brief status description
details	String	0..1	Additional detail of the response
/ResponseStatus			

Table 17 - General responses

Code	description
PCEHR_SUCCESS	SUCCESS

Table 18 - removeDocument responses

Code	description
PCEHR_ERROR_3002	Document metadata failed validation
PCEHR_ERROR_2501	Document not found

4.4.2 Standard SOAP faults

This section lists the standard SOAP codes as per the ATS 5820-2010 SOAP fault structure.

Table 19 - SOAP responses

errorCode	codeContext
badWsaMessageId	PCEHR_ERROR_0001 - Message ID element is missing
badlyFormedMsg	PCEHR_ERROR_0002 - SOAP header fault
badlyFormedMsg	PCEHR_ERROR_0003 - SOAP body fault
notAuthorised	PCEHR_ERROR_0004 - Authorisation denied
serviceTemporaryUnavailable	PCEHR_ERROR_0005 - A back end system is temporarily unavailable . Please try again. Error code: PCEHR_ERROR_0005
badParam	PCEHR_ERROR_0006 - Invalid common parameter
badParam	PCEHR_ERROR_0007 - An error has occurred - invalid IHI. Check the person's details and try again. Error Code: PCEHR_ERROR_0007
badParam	PCEHR_ERROR_0008 - Invalid HPI-I
badParam	PCEHR_ERROR_0009 - Invalid HPI-O
badlyFormedMsg	PCEHR_ERROR_0010 - The request did not contain the expected message format
serviceTemporaryUnavailable	PCEHR_ERROR_0011 - Unexpected service exception error
serviceTemporaryUnavailable	PCEHR_ERROR_0012 - Unexpected back end exception error
serviceTemporaryUnavailable	PCEHR_ERROR_0013 - Invalid back end response

errorCode	codeContext
serviceTemporaryUnavailable	PCEHR_ERROR_0014 - Unknown back end error code
badParam	PCEHR_ERROR_0501 - Accessing organisation element is not required
badParam	PCEHR_ERROR_0502 - Accessing organisation element is missing
badParam	PCEHR_ERROR_0503 - User name for audit element is missing
badParam	PCEHR_ERROR_0504 - User role for audit element is missing
badParam	PCEHR_ERROR_0505 - Invalid HPI-O
badlyFormedMsg	PCEHR_ERROR_0506 - Invalid request
serviceTemporaryUnavailable	PCEHR_ERROR_0507 - Unexpected service exception error
badlyFormedMsg	PCEHR_ERROR_0509 - SOAP header fault
badlyFormedMsg	PCEHR_ERROR_0510 - SOAP body fault
badParam	PCEHR_ERROR_0511 - ClientSystemType is missing
badEncryption	PCEHR_ERROR_0512 - Not a HTTPS request
badWsaAction	PCEHR_ERROR_0513 - Invalid WS-addressing action
badWsaTo	PCEHR_ERROR_0514 - WS-addressing "to" field is missing
serviceTemporaryUnavailable	PCEHR_ERROR_0515 - Audit service temporary unavailable
serviceTemporaryUnavailable	PCEHR_ERROR_0516 - Access service temporary unavailable
serviceTemporaryUnavailable	PCEHR_ERROR_0517 - A service is temporarily unavailable. Please try again. Error code: PCEHR_ERROR_0517
serviceTemporaryUnavailable	PCEHR_ERROR_0518 - Back end system temporary unavailable
notAuthorised	PCEHR_ERROR_0519 - System authorisation denied
badSignature	PCEHR_ERROR_0520 - The SOAP request has not been signed, or is signed incorrectly
badAlgorithmC14N	PCEHR_ERROR_0521 - The algorithm used for canonicalizing the data is not acceptable
badAlgorithmDigest	PCEHR_ERROR_0522 - The algorithm used for calculating the digest is not acceptable

errorCode	codeContext
badAlgorithmSignature	PCEHR_ERROR_0523 - The algorithm used for signing is not acceptable
badParam	PCEHR_ERROR_0524 - Attachment exceeds maximum supported size
badParam	PCEHR_ERROR_0525 - Request message must be XOP/MTOM
badParam	PCEHR_ERROR_0526 - Attachment MIME type is not supported

4.4.3 XDS.b responses

This section lists the supported XDS.b responses as per the structure identified in section 4.4.3.

4.4.3.1 ITI-18 Registry Stored Query service

The following additional responses are supported for the ITI-18 service. The errorCode for the below is “XDSRegistryError” and “XDSRegistryOutOfResources” respectively.

Table 20 - ITI-18 response

XDS errorCode	codeContext
XDSRepositoryError	PCEHR_ERROR_3002 - Document metadata failed validation
XDSRegistryOutOfResources	FindDocuments Stored Query for LeafClass is limited to 1000 documents on this Registry. Your query targeted XXXX documents

4.4.3.2 ITI-41 Provide & Register Document Set – b service

The following additional responses are supported for the ITI-41 service. The errorCode for the below is “XDSRepositoryError”.

Table 21 - ITI-41 response

codeContext
PCEHR_ERROR_3001 - Invalid document folder structure
PCEHR_ERROR_3002 - Document metadata failed validation
PCEHR_ERROR_3003 - No metadata found
PCEHR_ERROR_3004 - The document you are uploading failed template validation. The template package may be out of date. Error Code: PCEHR_ERROR_3004
PCEHR_ERROR_3005 - Document validation returned with errors and warnings. Details:<![CDATA..%Validate Templates Response%]>

codeContext

PCEHR_ERROR_3006 - The document you are uploading failed validation. Error Code: PCEHR_ERROR_3006
 Details:<! [CDATA..%Validate Templates Response%]>

PCEHR_ERROR_3007 - Document validation returned warnings. Details:<! [CDATA..%Validate Templates
 Response%]>

PCEHR_ERROR_3008 - Invalid template ID for PCEHR

4.4.3.3 ITI-42 Register Document Set - b service

The following additional responses are supported for the ITI-42 service. The errorCode for the contextCodes below is “XDSRegistryError”.

Table 22 - ITI-42 response

codeContext

PCEHR_ERROR_3001 - Invalid document folder structure

PCEHR_ERROR_3003 - No metadata found

PCEHR_ERROR_3008 - Invalid template ID for PCEHR

4.4.3.4 ITI-43 Retrieve Document Set service

The following additional responses are supported for the ITI-43 service.

The errorCode for below is “XDSRepositoryError”.

Table 23 - ITI-43 response

codeContext

PCEHR_ERROR_3501 - No metadata found

PCEHR_ERROR_3502 - Insufficient privileges to view the document

PCEHR_ERROR_3503 - Removed document not retrievable from PCEHR

PCEHR_ERROR_3002 - Document metadata failed validation

5 Engineering viewpoint

The engineering viewpoint includes definitions of mechanisms and functions to support distributed interactions between computational objects as a series of templates (i.e. patterns) for computational interactions. These, in turn, are parameterised to support a range of different policies defined in the enterprise, information or computational specifications.

5.1 Discovery services

The location of the services exposed by the My Health Record system will be shared between parties before interaction. Dynamic discovery mechanisms will not be provided.

Appendix A XSD and WSDL

A.1 Data types

A.1.1 IHE data types

The IHE XDS.b operations provided within this specification make use of a series of XML Schema Definitions provided by IHE. This specification does not extend, amend or otherwise update the IHE XML Schema Definitions (the WSDLs which use these definitions have been modified and are included in following sections).

The IHE XML Schema Definitions are available from the IHE TF Implementation Material [XDS.b SM].

A.1.2 My Health Record System data types

Table 23 below provides the name and description of the XML schema relevant for this specification. The schemas (XSD files) are packaged with the *My Health Record System B2B Client Library - Schema WSDL v4.0.0*. This is available from:

<https://www.digitalhealth.gov.au/implementation-resources/ehealth-reference-platform/EP-2603-2018/NEHTA-2378-2016>.

Table 24 - XML schemas

XML schema	Schema description
PCEHR_CommonTypes.xsd	Defines the XSD for common data types that are used by all WSDL interfaces.
PCEHR_RemoveDocument.xsd	Defines the XSD for remove document data types that are used by all WSDL interfaces.

Note: Military Health Number (an element to support the Australian Defence Force’s Joint eHealth Data Initiative, JeDHI) is included in the PCEHR_CommonTypes XSD to retain alignment of the My Health Record System with the change underway in the HI Service for Military Health Number to be added as a new demographic criteria.

A.2 XDS.b interfaces

A.2.1 Interface definition

Table 24 provides a list of WSDLs that defines the My Health Record System specific versions of the IHE XDS.b web services. These WSDLs are packaged with the *PCEHR B2B Client Library - Schema WSDL v2.0.0*. This is available from:

<https://developer.digitalhealth.gov.au/specifications/ehealth-reference-platform/ep-1940-2014/nehta-1932-2014>.

Table 25 - WSDLs

WSDL	Schema description
B2B_DocumentRepository.wsdl	The WSDL specification that defines the XDS.b document repository.
B2B_DocumentRegistry.wsdl	The WSDL specification that defines the XDS.b document registry.
B2B_RemoveDocument.wsdl	The WSDL specification that defines the XDS.b remove document.
B2B_RemoveDocumentInterface.wsdl	The WSDL specification that defines the XDS.b remove document interface.

Appendix B My Health Record System document link format

A My Health Record system document link is denoted by a URI of the following format:

```
pcehr:1.2.36.1.2001.1007.10.[PAI-R]/[doc-id]
```

Where PAI-R is a My Health Record system Assigned Identifier for a Repository and doc id is the identifier of a clinical document stored within the repository. The PAI-R may identify the My Health Record Repository or it may identify a Registered Repository.

The format for [doc-id] is “[root]^[extension]” when an extension is present, otherwise it is “[root]”, as shown by the following mappings.

Example 1

If doc-id is 013d5c25-1682-45bc-8984-ce0773df9a0d then document id is represented as:

```
<id root="013d5c25-1682-45bc-8984-ce0773df9a0d"/>
```

Example 2

If doc-id is 2.25.295835386144617648525177275513132113508 then document id is represented as:

```
<id root="2.25.295835386144617648525177275513132113508"/>
```

Example 3

If doc-id is 2.25.295835386144617648525177275513132113508^1 then document id is represented as:

```
<id root="2.25.295835386144617648525177275513132113508" extension="1"/>
```

Acronyms

The core set of terms used within the My Health Record system are specified within the My Health Record System Glossary [PCEHR-GLS].

Acronym	Description
CDA	Clinical Document Architecture
CIS	clinical information system
CRP	conformant repository provider
CSP	contracted service provider
HPI-I	Healthcare Provider Identifier Individual
HPI-O	Healthcare Provider Identifier Organisation
IHI	Individual Healthcare Identifier
LSS	logical service specification
MTOM	SOAP Message Transmission Optimization Mechanism.
NASH	National Authentication Service for Health
PAI-D	Participation Authentication Identifier for device, for example a computer
PAI-O	Participation Authentication Identifier for organisation
PCEHR	personally controlled electronic health record
TLS	Transport Layer Security
TSS	technical service specification
UML	Unified Modelling Language
WSDL	Web Service Definition Language
WSP	Web Service Profile – Commonly used to refer to the ATS-5820 Web Service Profile
XOP	XML-binary Optimized Packaging
XSD	XML Schema Definition
XDS.b	Cross-Enterprise Document Sharing (XDS.b) IHE Integration Profile as specified in [ITITF-1] Chapter 10 and extended by material relevant to XDS.b in [ITITF-2A], [ITITF-2B], [ITITF-2x], [ITITF-3].

References

- [ATS 5820-2010] Standards Australia, *ATS 5820-2010 E-health Web Services Profiles*, March 2010. Available from https://infostore.saiglobal.com/en-au/Standards/ATS-5820-2010-129646_SAIG_AS_AS_274357/
- [ATS 5821-2010] Standards Australia, *ATS 5821-2010 E-health XML Secured Payload Profiles*, March 2010. Available from https://infostore.saiglobal.com/en-au/Standards/ATS-5821-2010-129645_SAIG_AS_AS_274355/
- [DOCX-LSS] Australian Digital Health Agency, *My Health Record Document Exchange Service Logical Service Specification v1.4*, September 2019. Available from <https://developer.digitalhealth.gov.au/specifications/national-infrastructure/ep-2933-2019/dh-2943-2019>
- [CLN_PKG] Australian Digital Health Agency, *Clinical Documents - Clinical Package v1.0*, November 2011. Available from <https://developer.digitalhealth.gov.au/specifications/clinical-documents/ep-1094-2011/nehda-1226-2011>
- [CDA_PKG] Australian Digital Health Agency, *Clinical Documents - CDA Package v1.0*, November 2011. Available from <https://developer.digitalhealth.gov.au/specifications/clinical-documents/ep-1094-2011/nehda-1229-2011>
- [IHE_TS] IHE International, *IHE IT Infrastructure Technical Framework Supplement XDS Metadata Update, Rev. 1.11 – Trial Implementation*, 12 July 2019. Available from https://www.ihe.net/uploadedFiles/Documents/ITI/IHE_ITI_Suppl_XDS_Metadata_Update.pdf
- [ITITF-1] IHE International, *IHE ITI Infrastructure (ITI) Technical Framework Volume 1 (ITI TF-1) Integration Profiles, Revision 8.0 – Final Text*, 19 August 2011. Available from http://www.ihe.net/Technical_Framework/upload/IHE_ITI_TF_Rev8-0_Vol1_FT_2011-08-19.pdf
- [ITITF-2A] IHE International, *IHE IT Infrastructure Technical Framework Volume 2a (ITI TF-2a) Transactions Part A - Sections 3.1-3.28 Revision 8.0 – Final Text*, 19 August 2011. Available from http://www.ihe.net/Technical_Framework/upload/IHE_ITI_TF_Rev8-0_Vol2a_FT_2011-08-19.pdf
- [ITITF-2B] IHE International, *IHE IT Infrastructure Technical Framework Volume 2b (ITI TF-2b) Transactions Part B - Sections 3.29-3.51 Revision 8.0 – Final Text*, 19 August 2011. Available from http://www.ihe.net/Technical_Framework/upload/IHE_ITI_TF_Rev8-0_Vol2b_FT_2011-08-19.pdf
- [ITITF-2x] IHE International, *IHE IT Infrastructure Technical Framework Volume 2x (ITI TF-2x) Volume 2 Appendices Revision 8.0 – Final Text*, 19 August 2011. Available from http://www.ihe.net/Technical_Framework/upload/IHE_ITI_TF_Rev8-0_Vol2x_FT_2011-08-19.pdf
- [ITITF-3] IHE International, *IHE IT Infrastructure Technical Framework Volume 3 (ITI TF-3) Cross-Transaction Specifications and Content Specifications Revision 8.0 – Final Text*, 19 August 2011. Available from http://www.ihe.net/Technical_Framework/upload/IHE_ITI_TF_Rev8-0_Vol3_FT_2011-08-19.pdf
- [ITU-X.667] International Telecommunication Union, *ITU-T Recommendation X.667: Information technology - Open Systems Interconnection - Procedures for the operation of OSI Registration Authorities: Generation and registration of Universally Unique Identifiers (UUIDs) and their use as ASN.1*

- object identifier components*, September 2004. Available from <https://www.itu.int/ITU-T/studygroups/com17/oid/X.667-E.pdf>
- [MHR-GLS] My Health Record system: *Glossary*. Available from <https://www.myhealthrecord.gov.au/glossary>
- [NS2011] Namespaces for eHealth, 2011. Available from <http://ns.electronichealth.net.au/index.html>
- [PCEHR-B2B-LIB] Australian Digital Health Agency, *PCEHR B2B Client Library - Schema WSDL v2.0.0*, November 2014. Available from <https://developer.digitalhealth.gov.au/specifications/ehealth-reference-platform/ep-1940-2014/nehta-1932-2014>
- [RFC2119] Internet Engineering Task Force (IETF), *RFC 2119: Keywords for use in RFCs to Indicate Requirement Levels*, S. Bradner, March 1997. Available from <http://ietf.org/rfc/rfc2119.txt>
- [RM-ODP] International Organization for Standardization (ISO), *ISO/IEC 10746-3:2009 Information technology - Open distributed processing - Reference model: Architecture - Part 3*. Available from <https://www.iso.org/standard/55724.html>
- [UML2010] Object Management Group, *Unified Modeling Language v2.3*, May 2010. Available from <http://www.omg.org/spec/UML/2.3/>
- [W3C-XML-1.1] World Wide Web Consortium (W3C), *Extensible Markup Language (XML) 1.1 (Second Edition)*, September 2006. Available from <http://www.w3.org/TR/xml11/>
- [XDS] Integrating the Healthcare Enterprise (IHE), *Cross-Enterprise Document Sharing Implementation, IHE XDS.b Cross Document Exchange*. Available from http://wiki.ihe.net/index.php?title=Cross-Enterprise_Document_Sharing_Implementation
- [XDS.b SM] Integrating the Healthcare Enterprise (IHE), *IHE TF Implementation Material, Version 8*, August 2011. Available from ftp://ftp.ihe.net/TF_Implementation_Material/ITI/packages/XDSb.Support.Materials.v8.zip